

N-96-01

II-A-426

TG-040

NOISE HAZARD EVALUATION

SOUND LEVEL DATA OF NOISE SOURCES

Approved for public release, distribution unlimited.



US ARMY
ENVIRONMENTAL HYGIENE AGENCY
ABERDEEN PROVING GROUND, MD 21010

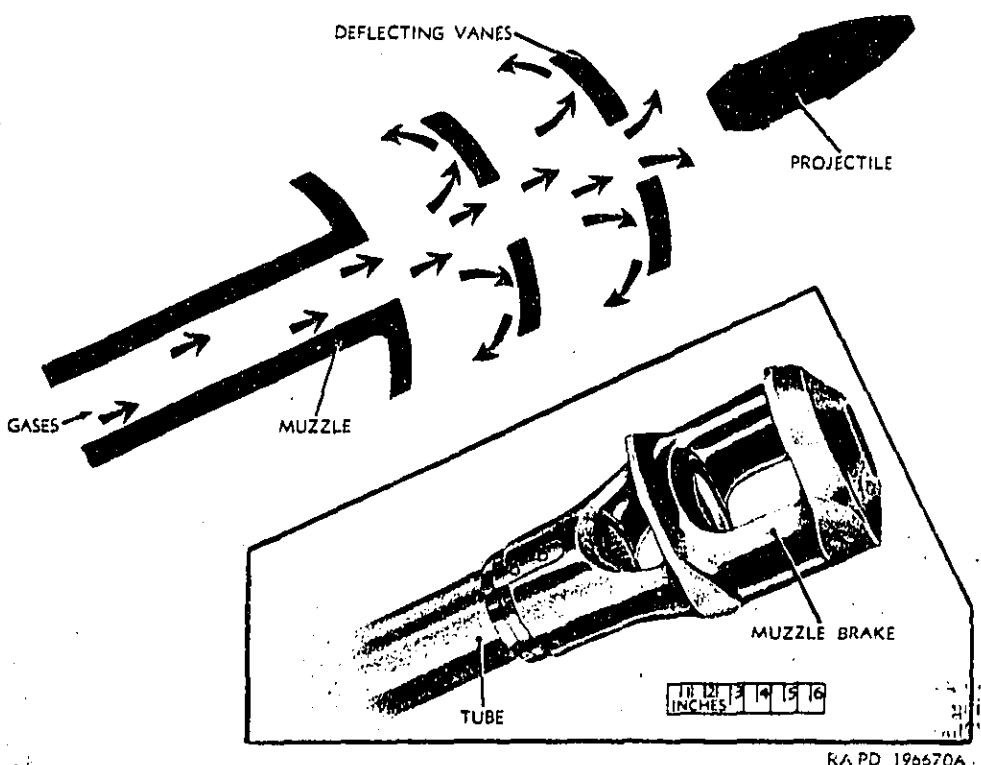


Figure 32. Muzzle brake principle.


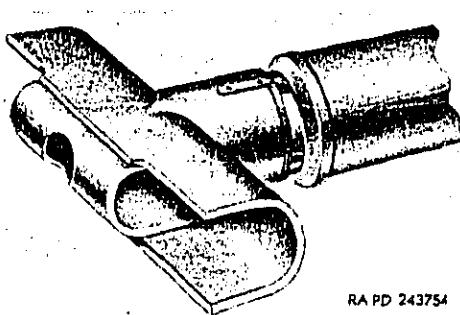


Figure 33. Blast deflector.

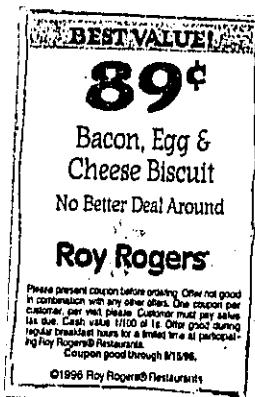

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) NOISE HAZARD EVALUATION, SOUND LEVEL DATA OF NOISE SOURCES		5. TYPE OF REPORT & PERIOD COVERED Technical Guide January 1975
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) JEFF GOLDSTEIN		8. CONTRACTOR OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS US ARMY ENVIRONMENTAL HYGIENE AGENCY ABERDEEN PROVING GROUND, MD 21010		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS US ARMY HEALTH SERVICES COMMAND FT SAM HOUSTON, TX 78234		12. REPORT DATE January 1975
		13. NUMBER OF PAGES 55
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) NOISE HAZARD EVALUATION PERSONNEL EXPOSURE LEVELS		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This technical guide was developed as an aid and simplification of the noise hazard assessment element of the installation hearing conservation program. Part I of the technical guide provides the reader with basic information necessary for the conduct of a routine occupational noise hazard evaluation, while part II provides additional information and guidance concerning typical personnel exposures to military noise sources.		

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

PREFACE

This technical guide was developed as an aid and simplification of the noise hazard assessment element of the installation hearing conservation program. Part I of the technical guide provides the reader with basic information necessary for the conduct of a routine occupational noise hazard evaluation, while Part II provides additional information and guidance concerning typical personnel exposures to military noise sources. Other technical guides available from USAEHA in this hearing conservation series are: (1) Hearing Protective Devices; Fitting, Care, and Use, and (2) Regulations, Specifications, Standards and Sample Installation Supplement to AR 40-5 for Conservation of Hearing. Guidance for the establishment of occupational hearing conservation programs is furnished by TB Med 251 and applicable portions of AR 40-5.

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

CONTENTS

	<u>Page</u>
PART I - NOISE HAZARD EVALUATION	
I. INTRODUCTION	1
II. THE SOUND LEVEL METER	1
III. HEARING CONSERVATION CRITERIA	4
IV. THE NOISE SURVEY	7
V. OTHER INSTRUMENTATION	10
VI. NOMENCLATURE AND NATIONAL STOCK NUMBERS OF NOISE MEASUREMENT EQUIPMENT	12
PART II - SOUND LEVEL DATA OF NOISE SOURCES	
I. INTRODUCTION	13
II. WEAPON CONTOURS	14
A. Individual- and Crew-Served Small Arms	14
B. Artillery Weapons	14
III. SOUND LEVEL DATA	30
A. Aircraft: Fixed Wing	30
B. Aircraft: Rotary Wing	31
C. Aircraft: Short Takeoff/Landing	31
D. Data Processing	32
E. Machinery Fabrication: Metalworking	33
F. Machinery Fabrication: Paper, Printing and Publishing ..	34
G. Machinery Fabrication: Stone, Clay and Glass	35
H. Machinery Fabrication: Textile/Apparel	35
I. Machinery Fabrication: Woodworking	36
J. Machinery Fabrication: Pneumatic	39
K. Machinery Fabrication: General	40
L. Vehicles: Noncombat	41
M. Vehicles: Combat	47
N. Vehicles: General	48
O. Weapons: Artillery	48
P. Weapons: Individual Small Arms	49
Q. Weapons: Crew-Served Small Arms	49
R. Weapons: Armament Subsystems	50
S. Weapons: Missile Systems	51
IV. HEARING PROTECTIVE DEVICES	52
V. SOUND MEASUREMENTS	53
A. References	53
B. Measurements	53
C. Weapon Characteristics	54
APPENDIX - Weapon Characteristics	55

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED



DEPARTMENT OF THE ARMY
U S ARMY ENVIRONMENTAL HYGIENE AGENCY
ABERDEEN PROVING GROUND, MARYLAND 21010

HSE-OB Technical Guide (Med)*

January 1975

NOISE HAZARD EVALUATION - SOUND LEVEL DATA OF NOISE SOURCES

PART I - NOISE HAZARD EVALUATION

I. INTRODUCTION. A hearing conservation program consists of five fundamentals:

- A. Noise Hazard Evaluation.
- B. Engineering Noise Control.
- C. Health Education.
- D. Audiometry.
- E. Hearing Protection.

This technical guide concerns the first of these five fundamentals, i.e., the determination of whether the noise associated with various operations constitutes a potential hearing hazard.

II. THE SOUND LEVEL METER.

A. There is a simple test to determine if a potential hearing hazard is associated with a specific operation - try to carry on a conversation in the area. If it is difficult to converse without shouting, further investigation is necessary. This further investigation should be performed with a sound level meter.

B. The sound level meter changes noise into an electrical signal. The amplitude of this signal is then displayed on a meter. Thus, the sound level meter reads the noise levels directly in terms of the decibel (dB).

C. All sound level meters have at least three components: (see Figure 1)

- 1. Transducer (microphone) to capture the sound waves.
- 2. Amplifier to give high gain and low noise, permitting the use of weighting networks and filters.


3. A meter to indicate the value of the amplified signal. The meter is read in decibels which reflects the ear's amplitude sensitivity to sound pressure level changes.

D. There are three types of sound level meters:

- 1. Type I - Precision Laboratory.
- 2. Type II - General Purpose.
- 3. Type III - Survey.

* This Technical Guide supersedes USAEHA-OR, Technical Guide (Med), Sound Level Data of Military Noise Sources, January 1972

FIGURE 1.
BLOCK DIAGRAM OF SOUND LEVEL METER

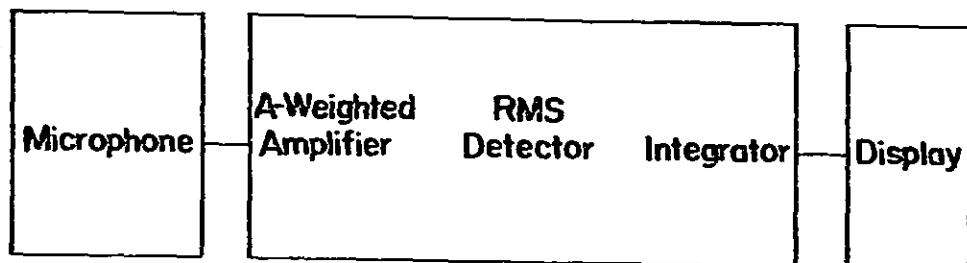


Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

The Types I and II sound level meters are acceptable for use within the Department of the Army (DA). The Type I meter is more accurate than a Type II sound level meter; however, it is much more expensive and more difficult to use. For most applications, the Type II meter is recommended because of these economic and usability considerations.

E. Sound level meters are produced to the same performance specifications worldwide. Therefore, the readings for identical sounds are consistent from one instrument to another.

F. Most sound level meters have three frequency response characteristics or weighting networks: A-weighting [dB(A)], B-weighting [dB(B)], and C-weighting [dB(C)]. (See Figure 2)

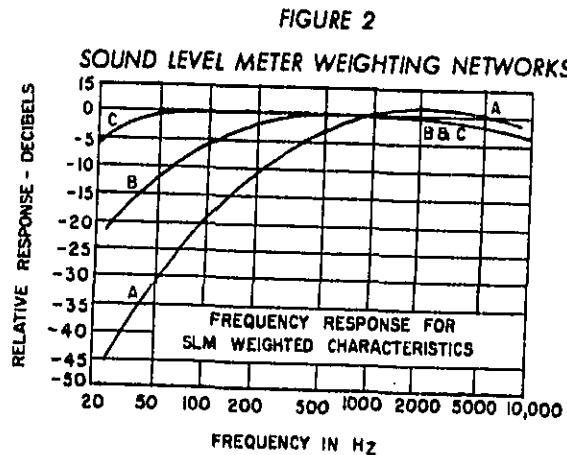

The ear is not as sensitive to low frequency sounds as it is to high frequency sounds. The A-weighting network of the sound level meter filters out the very low frequencies. Thus, the A-weighting network response approximates the response of the human ear. Sounds measured with this sound level meter weighting network are referred to as dB(A).

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

- G. The sound level meter has the following features: (see Figure 3)
1. On-off switch.
 2. Battery check switch.
 3. Network selector.
 4. Fast-slow meter response switch.
 5. Attenuator with 10 dB steps.
 6. Indicating meter.

III. HEARING CONSERVATION CRITERIA.

A. Time-Weighted for Steady Noise. (Steady noise is a noise of nontransient nature. It has negligibly small fluctuations of level within a short period of observation. Examples of steady noise are rain, motors, air-conditioners, etc.)

1. For hearing conservation purposes, the maximum exposure recommended by the Occupational Safety and Health Act (OSHA) to single-level steady noise in dB(A) varies with the duration of the exposure as shown in the following table.

TABLE
MAXIMUM RECOMMENDED SOUND LEVEL
EXPOSURE TO STEADY NOISE
MEASURED IN dB(A)


Exposure Duration Per Day In Hours	OSHA	US Army TB MED 251*
16		80 dB(A)†
8	90 dB(A)	85 dB(A)
6	92 dB(A)	87 dB(A)
4	95 dB(A)	90 dB(A)
3	97 dB(A)	92 dB(A)
2	100 dB(A)	95 dB(A)
1 1/2	102 dB(A)	97 dB(A)
1	105 dB(A)	100 dB(A)
1/2	110 dB(A)	105 dB(A)
1/4 or less	115 dB(A) (ceiling)	110 dB(A) (ceiling)

*TB MED 251, Noise and Conservation of Hearing, 7 March 1972.

†To be added in the proposed revision of TB MED 251.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

FIGURE 3
SOUND LEVEL METER

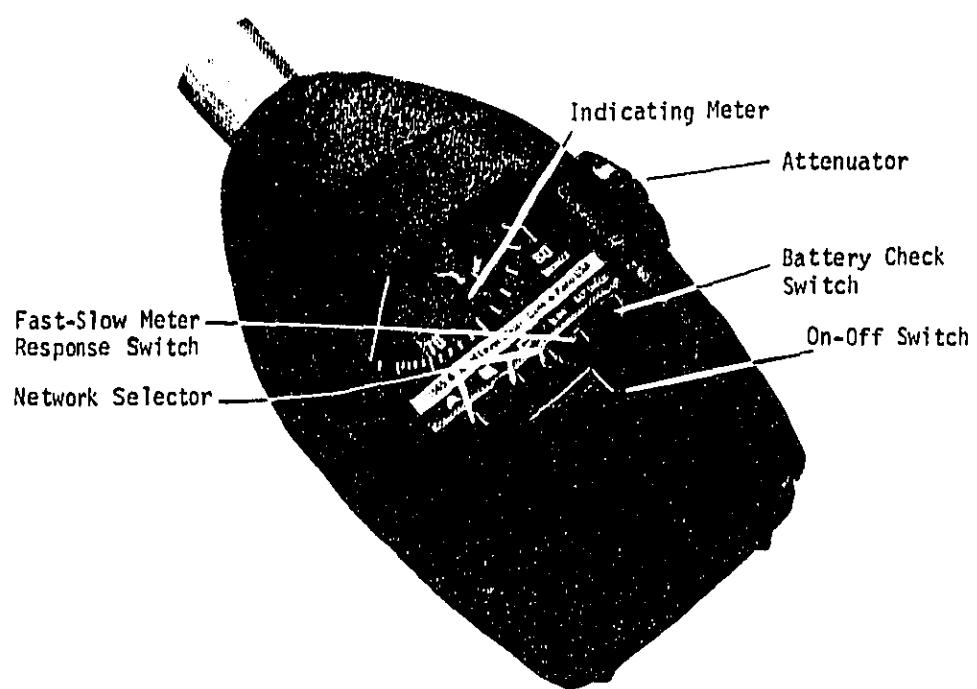

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

2. A time-weighted criterion, 5 decibels more stringent than that recommended by OSHA for use at DA installation or activities, is also presented in the table. This criterion should be used only to:

a. Determine a requirement to initiate engineering control measures in order to eliminate the noise hazard.

b. Determine the noise hazard in identified noise-hazardous areas, equipment, and operations that are not practically suitable to the threshold criterion presented in paragraph III B.

3. When the daily exposure is composed of two or more periods of different noise levels, the levels and exposure durations are combined as follows to determine whether the maximum recommended exposure is exceeded:

If the sum of $\frac{A_1}{T_1} + \frac{A_2}{T_2} + \dots + \frac{A_n}{T_n}$ (exceeds unity)

"A" indicates actual exposure duration at the different noise levels, and "T" the exposure time permitted at each level as determined from the criterion utilized. For example, utilizing the recommended TB MED 251 time-weighted criterion, a given worker's exposure during an 8-hour day is:

85 dB(A) - 0.5 hr.
87 dB(A) - 1.0 hr.
92 dB(A) - 0.5 hr.

The combined exposure is:

$$\frac{0.5}{8} + \frac{1.0}{6} + \frac{0.5}{3} = 0.4 \text{ (less than unity)}$$

The exposure is therefore within maximum recommended limits.

B. Threshold Criterion for Steady Noise. (Threshold, in this context, is the value which, when exceeded, constitutes a potentially hazardous exposure.)

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

1. Within DA facilities, areas or operations will be designated as noise hazardous when an individual is exposed to steady noise levels above 85 dB(A), regardless of length of exposure. OSHA criteria will not be followed. The Army time-weighted criterion may be applied for only those situations discussed in paragraph III.A.1 (reference TB MED 251).

2. From the standpoint of realistically administering a hearing conservation program, the threshold criterion should always be used. Although the time-weighted criterion is technically accurate, there are many practical disadvantages to using this method in the field.

C. Threshold Criterion for Impact or Impulse Noise. (Impact or impulse noise is noise of a transient nature, such as that due to impact or explosive bursts, e.g., gunfire, hammering.)

1. The maximum permissible level of any impact noise at the ear is 140 dB peak sound pressure level (reference TB MED 251).

2. Impact or impulse noise can only be measured on a sound level meter with an impulse meter response characteristic, or on special instrumentation, such as an impact noise analyzer.

D. Typical Noise Levels:

Rustling leaves	20 dB(A)
Whisper	34 dB(A)
Window air-conditioner	55 dB(A)
Conversation	60 dB(A)
Vacuum cleaner (at 10 ft)	65 dB(A)
Alarm clock (at 2 ft)	80 dB(A)
Printing plant	86 dB(A)
Diesel truck (at 25 ft)	92 dB(A)
Air compressor	94 dB(A)
Cut-off saw	97 dB(A)
Lawn mower	98 dB(A)
Bench grinder	105 dB(A)
Air chisel	106 dB(A)
Vacuum pump	108 dB(A)
Chain saw	115 dB(A)
M14 rifle	160 dB peak sound pressure level
Howitzer	185 dB peak sound pressure level

IV. THE NOISE SURVEY

A. General.

1. A complete inventory and measurement of noise-hazardous equipment should be conducted at least annually. In addition, noise measurements should

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

be taken within 30 days of the procurement of new, potentially noise-hazardous equipment; the modification of noise-hazardous equipment; and any change in equipment operational procedures.

2. Even though noise is a complex phenomenon, noise measurements are relatively simple to make. The noise survey includes many noise measurements and observations which permit the evaluation of noise exposure.

3. Before using the sound level meter, investigate the area in which the noise survey is to be made to determine what measurements would be representative of employee noise exposure. The problem is to determine whether or not each worker or group of workers is being exposed to noise which may damage their hearing. First, determine the location or locations where noise measurements will be made. It is essential that measurements are made at all locations where the worker spends his work day. Go into the work area and ask questions - get a "feel" for the problem. Get all the essential information you need before even attempting to measure with the sound level meter.

B. Operational Pre-Check.

1. A sound level meter, like any precision instrument, should be checked regularly. At a minimum, the sound level meter must be checked before it is taken into the field.

2. An acoustic calibrator is an essential part of the noise measuring system. By fitting it over the microphone, the sensitivity of the sound level meter, including the microphone, can be checked. A step-by-step pre-check involves:

- a. Turn power on.
- b. Check for visual damage of meter.
- c. Check batteries.
- d. Allow the instrument to warm up for a few minutes.
- e. Calibrate with an acoustic calibrator in a quiet location.

(Consult the instruction manual supplied with the instrument for the proper calibration and battery check procedures for your particular sound level meter.)

3. Once the sound level meter is turned on, leave it on if you know you will be using it within a short period of time. Do not keep turning the meter on and off.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

4. If the sound level meter appears to be out of calibration, consult the instruction manual supplied with the instrument for necessary adjustment or repairs.

5. If the battery check indicates weak batteries, the batteries should be replaced before making measurements.

C. The Survey.

1. Take extreme care in transporting the sound level meter. Do not bang it around. Do not expose it to temperatures above 115° F. Do not leave it in the trunk or inside a closed automobile on a hot, summer day. Do not expose it to any moisture.

2. In most areas you will be concerned primarily with noise near the normal position of the worker's ear. You may wish to measure the noise at other points in the work space as well, depending upon the area.

3. Try to get measurements during typical normal operations. In noting your results, always specify the machinery operating, and the characteristics of the operation.

4. The essential information required for noise hazard evaluation has to be in terms of dB(A). Therefore, be sure your sound level meter is set to the A-weighting network when making noise measurements. The results should always be written as "dB(A)". For example, "87 dB(A)" is correct; "87 dB", "87 noise level", and "87 sound level" are all incorrect.

5. Use the slow setting on the sound level meter. This averages the rapid fluctuations of sound levels and makes meter reading easier.

6. Operation of the sound level meter is a simple five-step procedure:

a. Set the weighting switch to "dB(A)".

b. Set the meter response to "slow".

c. Adjust the meter range switch.

d. Read the meter.

e. Add the meter reading to the range setting.

7. Consult the instruction manual supplied with the instrument for information on how to point the sound level meter.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

8. Hold the sound level meter away from your body when taking noise measurements.
 9. Be alert to detect errors due to the operation of the equipment, calibration of the system, or the influence of the environment.
 10. Upon completion of the survey, re-check the calibration of the sound level meter.
- D. Hearing Conservation Program Noise Survey Data Card. The sample Hearing Conservation Program Noise Survey Data Card shows all the information needed for a noise survey (see Figure 4).
1. Record date, time of day, and exact building or area location. This identifies the measurement conditions.
 2. Record the sound level values measured [dB(A), peak sound pressure level (SEL), etc.].
 3. Record the performance conditions or the operation characteristics of the machinery during noise measurement (rpm, load, etc.). Also record the location of the sound level meter microphone (operator's ear, etc.). Draw a diagram if necessary.
 4. Record the number of people exposed to the noise source and the duration of exposure.
 5. Document whether the area had previously been designated noise-hazardous, whether appropriate caution signs are posted, if hearing protective devices are being used, and if audiometric evaluations are given to personnel working in the area.
 6. Record the recommendations for action on the Noise Survey Data Card to insure that they are never separated from the noise measurement records for the location.
 7. Keep a record of the type, model, manufacturer, and serial number of the sound level meter and calibrator used for the survey, as well as the name of the individual performing the survey.
 8. Keep these forms in your hearing conservation program files. OSHA requires that these records be kept for a minimum of 5 years.

V. OTHER INSTRUMENTATION.

- A. When noise levels to which an individual is exposed fluctuate significantly and often during the work day, the manual computation technique

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

FIGURE 4
HEARING CONSERVATION PROGRAM
NOISE SURVEY DATA CARD

Building No.:	Directorate:	Date:	
Shop:	Division:	Time:	
DIAGRAM & DESCRIPTION		Notes	NOISE EXPOSURE
			<u>Steady Noise</u> <u>Continuous</u> _____ 63 _____ <u>Intermittent</u> _____ 125 _____ _____ 250 _____ <u>Impact Noise</u> <u>Continuous</u> _____ 500 _____ <u>Intermittent</u> _____ 1000 _____ _____ 2000 _____ _____ 4000 _____ _____ 8000 _____ <u>A Scale</u> _____ <u>C Scale</u> _____ <u>Impulse Noise</u> <u>Peak</u> _____
			<u>Steady Noise</u> <u>Continuous</u> _____ 63 _____ <u>Intermittent</u> _____ 125 _____ _____ 250 _____ <u>Impact Noise</u> <u>Continuous</u> _____ 500 _____ <u>Intermittent</u> _____ 1000 _____ _____ 2000 _____ _____ 4000 _____ _____ 8000 _____ <u>A Scale</u> _____ <u>C Scale</u> _____ <u>Impulse Noise</u> <u>Peak</u> _____
REMARKS			
Microphone Position:			
<hr/> <hr/> <hr/>			
Area Previously Designated: Yes. _____ No. _____			
No. of employees exposed: _____			
Duration of exposure: _____			
Hearing protection:			
Used _____ Not Used _____ Type _____			
Signs Posted. _____ Signs not posted. _____			
Audiometric evaluation? Yes. _____ No. _____			

USAEHA Form 3404, 15Sep72. Replace USAEHA
Form NP-1, 15Sep69 which may be used.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

(time-weighting) becomes difficult and time consuming to perform reliably and accurately. The use of a noise dosimeter which automatically measures and computes the total exposure is more economical. Audio-dosimeters are instruments which measure the noise amplitude to which the ear is exposed, and integrates it against the time of exposure on a continuous basis during the 8-hour work day. Because DA facilities adhere to a threshold criterion of 85 dB(A), audio-dosimeters should not be used.

B. The octave band analyzer is an instrument which is used to separate a complex noise into frequency bands one octave in width, and measures the sound pressure level in each of the bands. This is useful in studying a noise source to determine a suitable engineering noise control procedure. Octave band analysis is not needed for the routine hearing conservation noise survey.

VI. NOMENCLATURE AND NATIONAL STOCK NUMBERS (NSN) OF NOISE MEASUREMENT EQUIPMENT.

A. Sound Level Meters (NSN 6625-00-003-9714, Sound Level Meter, General Purpose, ANSI Standard S1.4-1971). A battery-powered portable instrument to measure noise levels up to 140 decibels. Meets the specifications for a Type II instrument set forth in American National Standards Institute (ANSI) 1969 Standard S1.4-1971, "Specifications for Sound Level Meters".

B. Sound Level Calibrator (NSN 6625-00-438-0626). A battery-powered portable unit for making accurate field calibrations on microphones and noise measuring instruments. A sound level calibrator must be available for the calibration of noise measuring instrumentation, prior to, during, and after each noise measuring session .

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

PART II - SOUND LEVEL DATA OF NOISE SOURCES

I. INTRODUCTION.

A. Guidance for the establishment of occupational hearing conservation programs is furnished by TB MED 251 and applicable portions of AR 40-5.*

B. The purpose of Part II of this Guide is to provide additional information concerning exposure to noise sources and the use of personal hearing protective devices. This includes:

1. Representative 140 dB peak sound pressure level contours of small arms and artillery weapons.

2. Peak sound pressure level measurements of weapons at the firer or crewman positions.

3. Maximum A-weighted sound pressure levels of fixed- and rotary-wing aircraft, combat and noncombat vehicles, powered metalworking and woodworking machinery, data processing equipment, pneumatic machinery, construction equipment, and other machinery.

4. Data relative to the type, nomenclature, and use of hearing protective devices.

5. Acoustic measurement procedures and references used in the preparation of the sound level data.

*AR 40-5, Preventive Medicine, 25 September 1974.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

II. WEAPON CONTOURS.

A. Individual- and Crew-Served Small Arms.

Figure 5	Test Site Plan
Figure 6	.45 Caliber Pistol, Automatic, M1911
Figure 7	50 Caliber Machine Gun, M3
Figure 8	7.62 mm Machine Gun, M60
Figure 9	81 mm Mortar, M1
Figure 10	90 mm Rifle, M67
Figure 11	66 mm Light Anti-Tank Weapon, M72

B. Artillery Weapons.

Figure 12	Test Site Plan
Figure 13	120 mm Gun, Tank Mounted
Figure 14	152 mm Gun, Pedestal Mounted.
Figure 15	105 mm Howitzer, Light, Towed, M114
Figure 16	155 mm Self-Propelled Howitzer, M109
Figure 17	155 mm Howitzer, Medium, Towed, M114A1
Figure 18	8-In. Howitzer, Heavy, Self-Propelled, M110
Figure 19	175 mm Gun, Self-Propelled, M107

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources


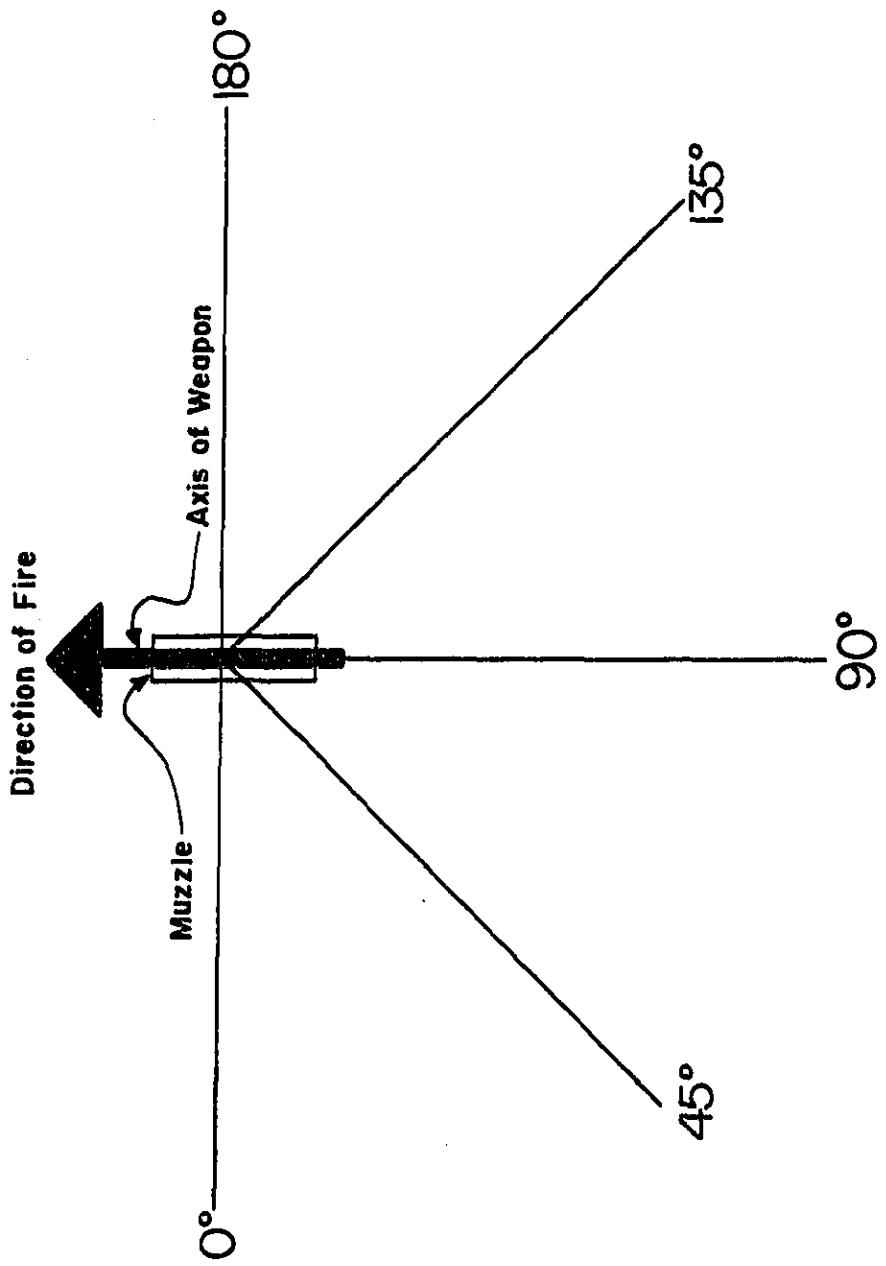


FIGURE 5 TEST SITE PLAN

NOISE REPOSITORY CONTOUR SHEET

MATERIEL CATEGORY Weapon: Individual NOMENCLATURE CAL .45 Pistol, Automatic, M1911 PSN _____
 MFG MODEL SERIAL NO. REPORT TITLE Bio-Acoustics Sp Study No 34-007-7'
 REPORT NO. ORGANIZATION INVESTIGATOR(S) DATE Nov 1970

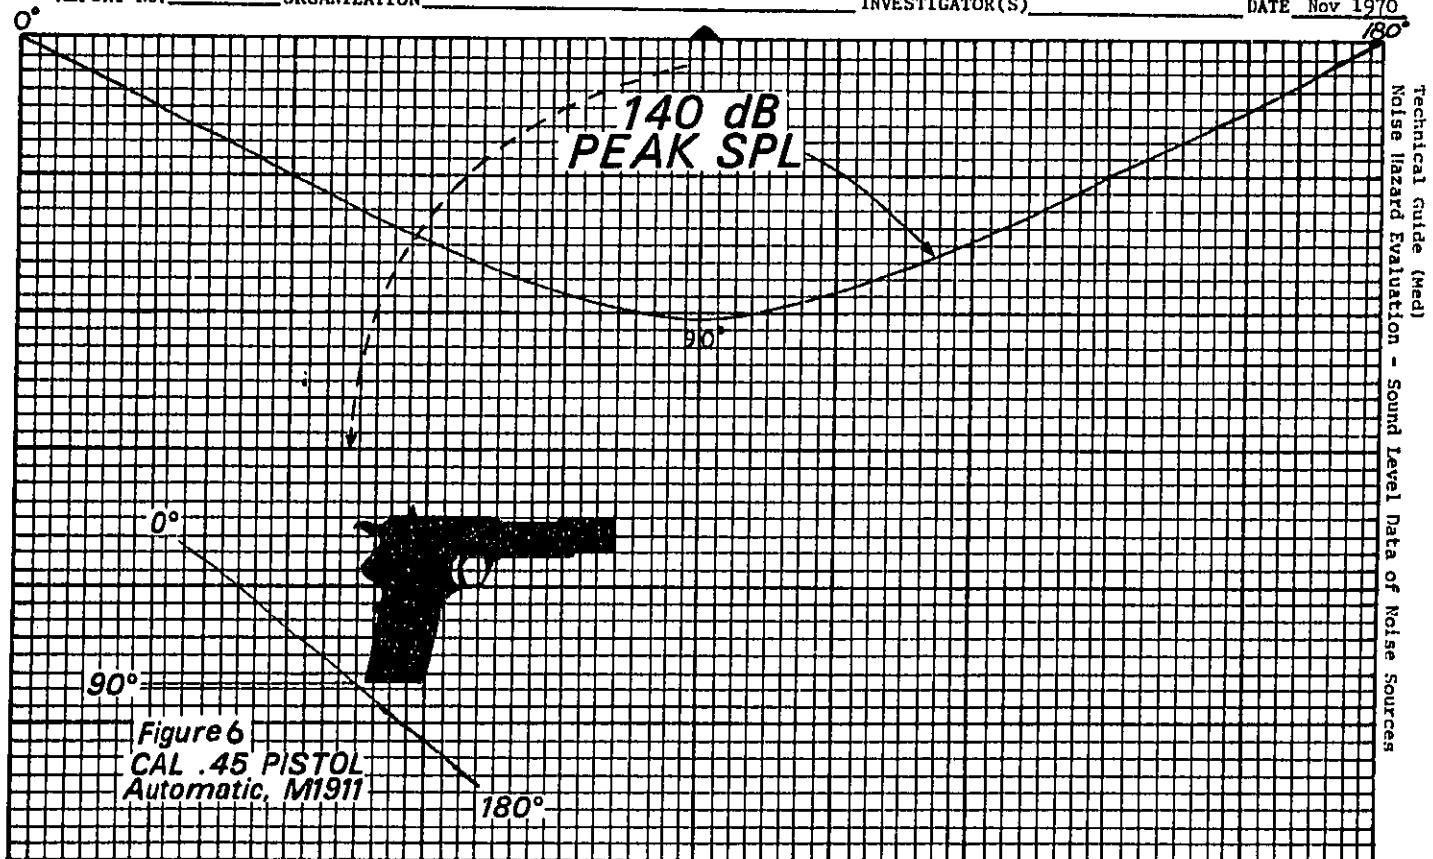


SCALE 1" = _____

USAEHA Form NP-2-2, 3 Feb 70



NOISE REPOSITORY CONTOUR SHEET

MATERIEL CATEGORY Weapon: Crew Served NOMENCLATURE 50 CAL Machine Gun, M3 FSN
 MFG MODEL SERIAL NO. REPORT TITLE Bio-Acoustics Sp Study No. 31-007-71
 REPORT NO. ORGANIZATION US Army Environmental Hygiene Agency INVESTIGATOR(S) Bragdon, Pearce DATE Nov 1970

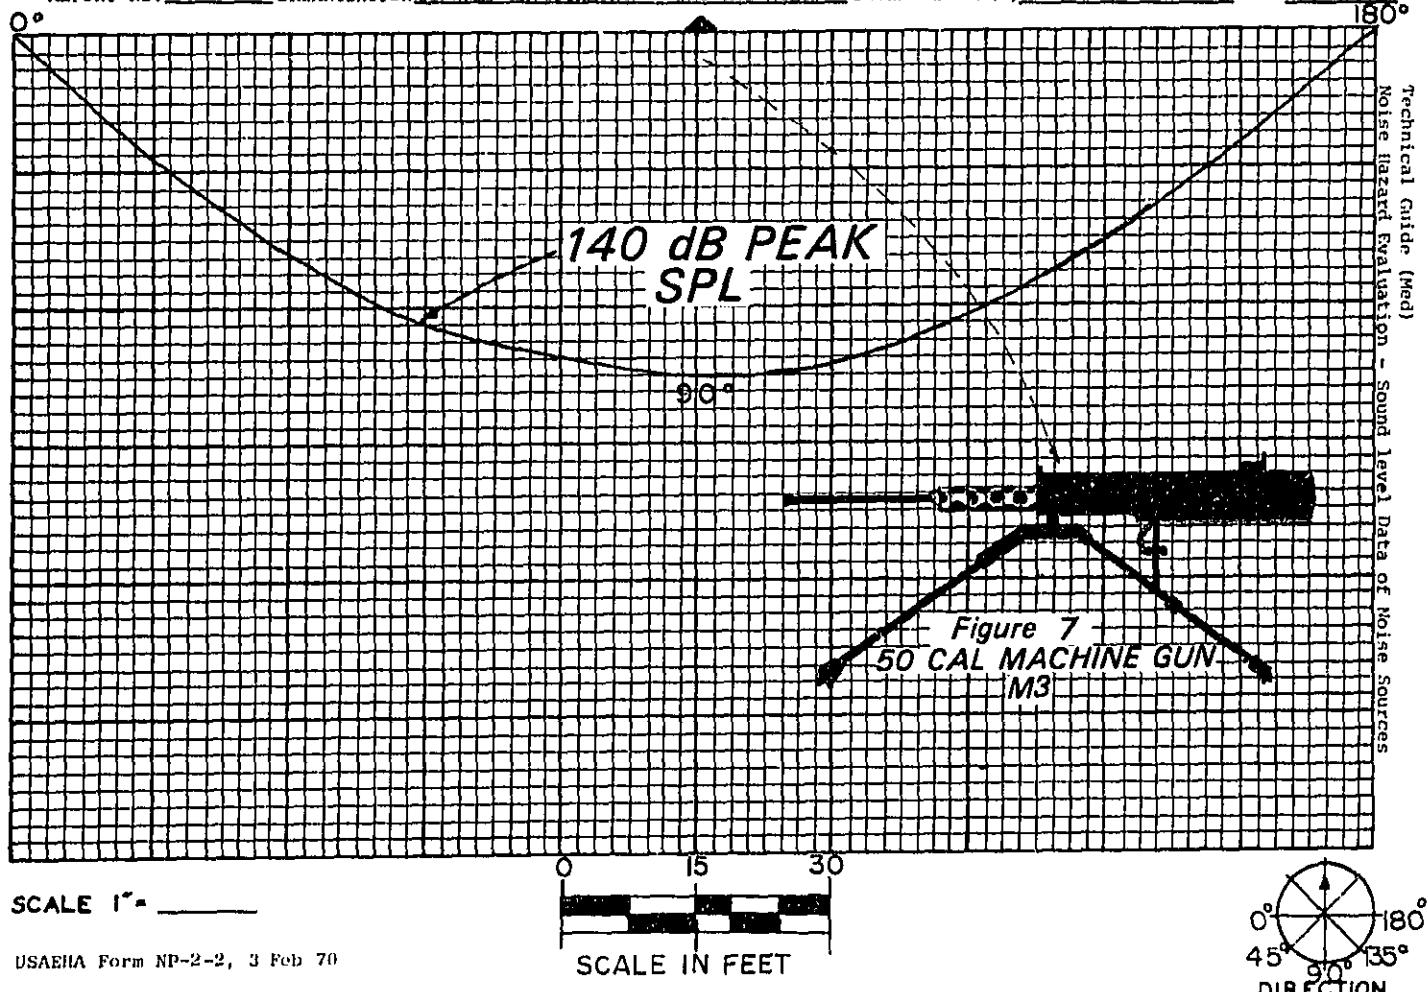


SCALE 1" = _____

USAEHA Form NP-2-2, 3 Feb 70

NOISE REPOSITORY CONTOUR SHEET

MATERIEL CATEGORY Weapon: Individual NOMENCLATURE 7.62 MM Machine Gun, M60 PSN
 MFG MODEL SERIAL NO. REPORT TITLE Bio-Acoustics Sp Study No. 34-007-71
 REPORT NO. ORGANIZATION US Army Environmental Hygiene Agency INVESTIGATOR(S) Bragdon, Bearce DATE Nov 1970

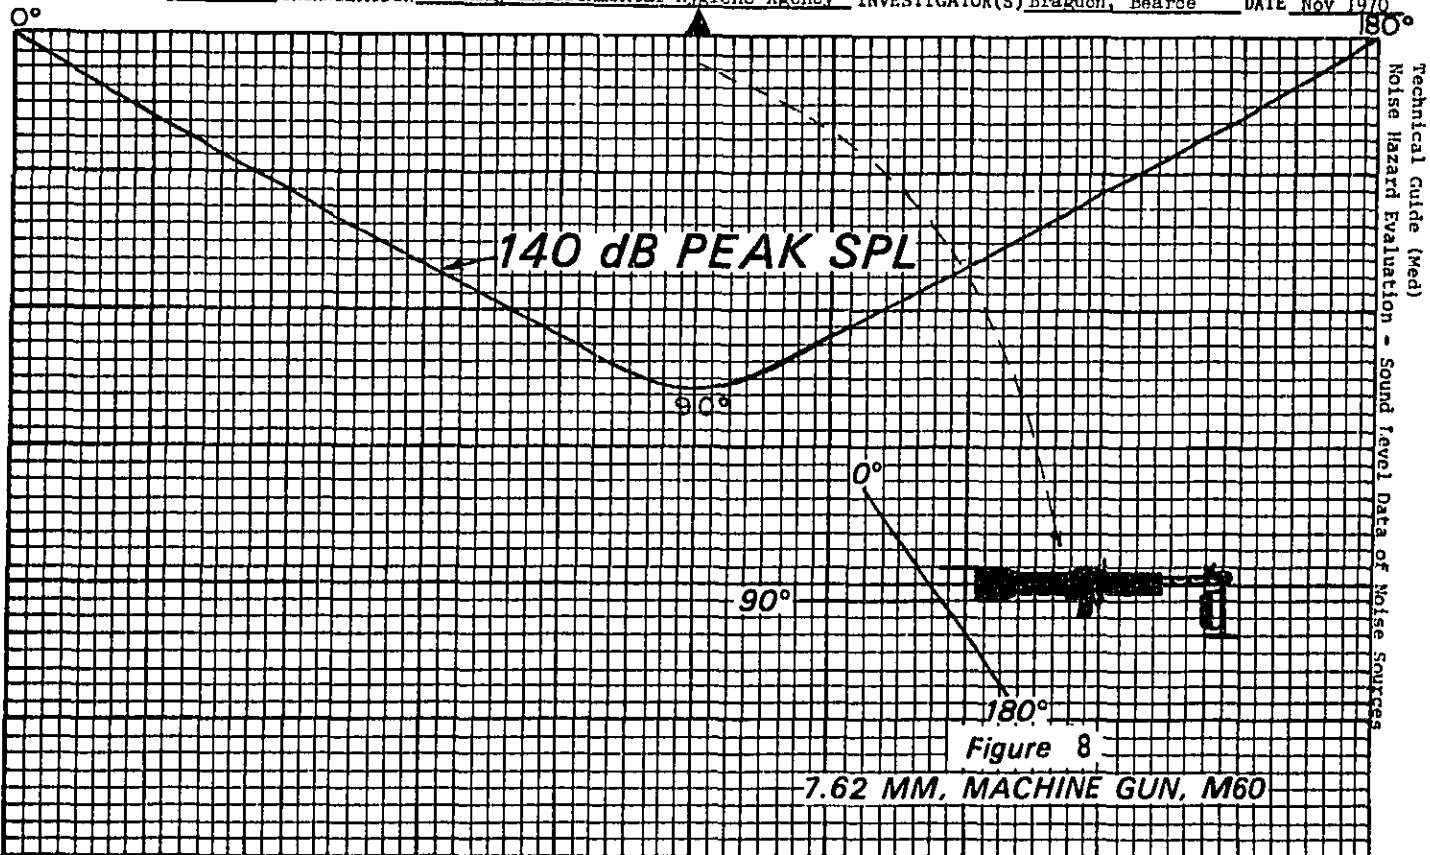

SCALE 1" = _____




USAEHA Form NP-2-2, 3 Feb 70



NOISE REPOSITORY CONTOUR SHEET


MATERIEL CATEGORY Weapon: Crew Served NOMENCLATURE 81 mm Mortar, M1 FSN
 MFG MODEL SERIAL NO. REPORT TITLE Bio-Acoustics Sp Study No. 34-007-7
 REPORT NO. ORGANIZATION US Army Environmental Hygiene Agency INVESTIGATOR(S) Bradon, Pearce DATE Nov 1970

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Travel Data of Noise Sources

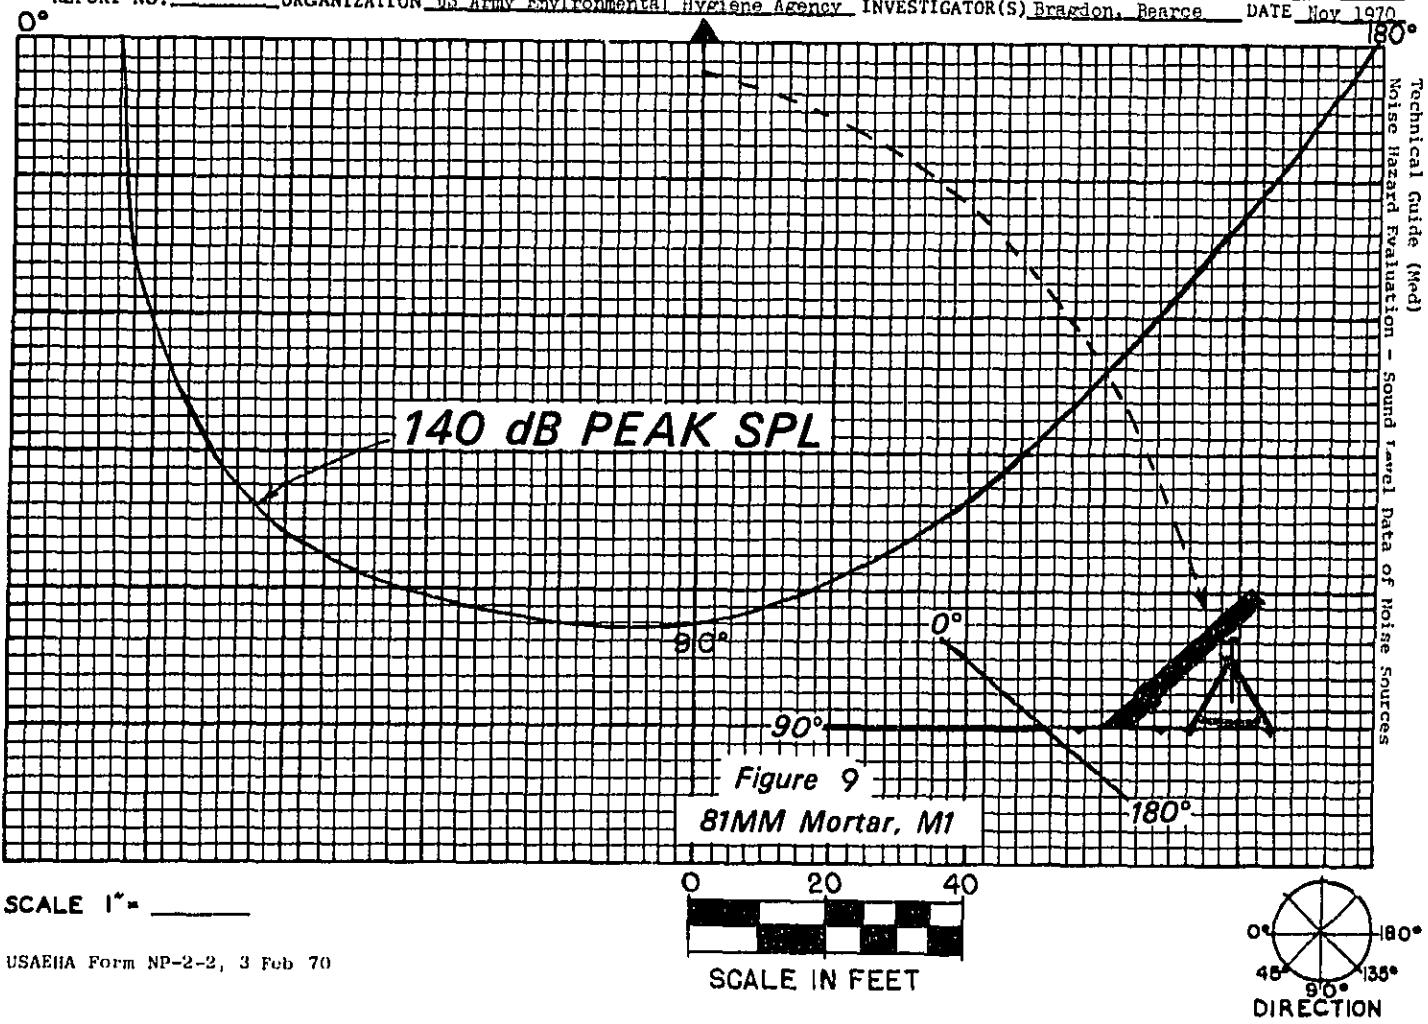

NOISE REPOSITORY CONTOUR SHEET

MATERIEL CATEGORY Weapon: Crew Served NOMENCLATURE 90 MM Rifle, M67 PSN _____
 MFG MODEL _____ SERIAL NO. _____ REPORT TITLE Bio-Acoustics Sp Study No. 34-007-71
 REPORT NO. _____ ORGANIZATION US Army Environmental Hygiene Agency INVESTIGATOR(S) Bragdon, Pearce DATE Nov 1970

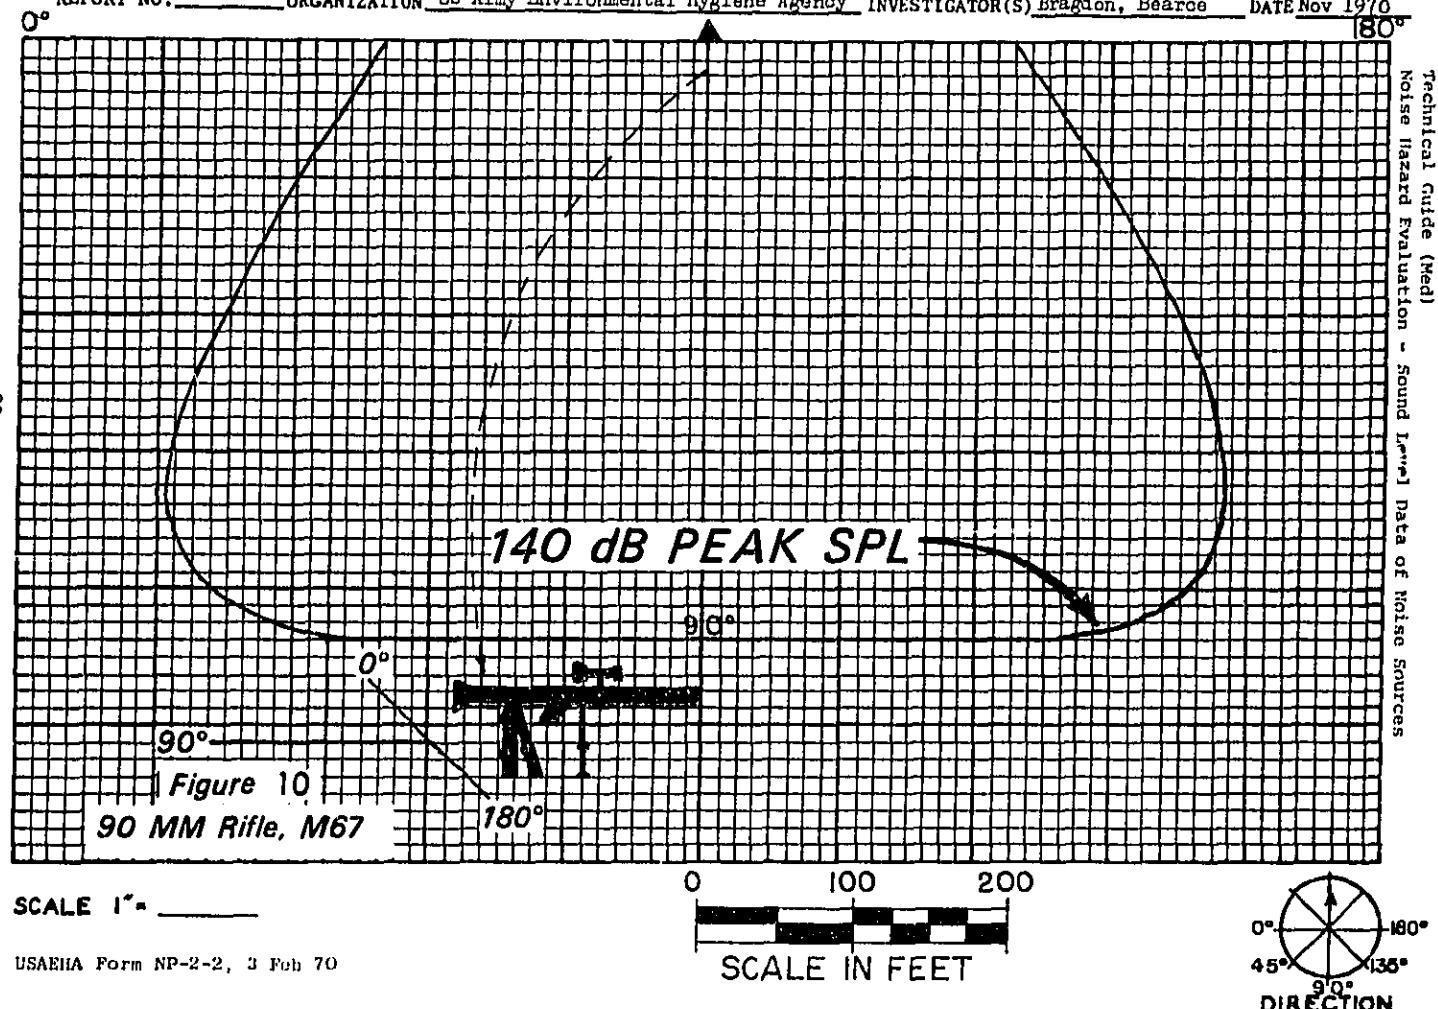


USAEHA Form NP-2-2, 3 Feb 70

NOISE REPOSITORY CONTOUR SHEET


MATERIEL CATEGORY Weapon: Individual NOMENCLATURE 66 mm Light Anti-Tank Weapon, M72 FSN
 MFG MODEL SERIAL NO. REPORT TITLE Bio-Acoustics Sp Study No. 34-007-71
 REPORT NO. ORGANIZATION US Army Environmental Hygiene Agency INVESTIGATOR(S) Bragdon, Pearce DATE Nov 1970

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

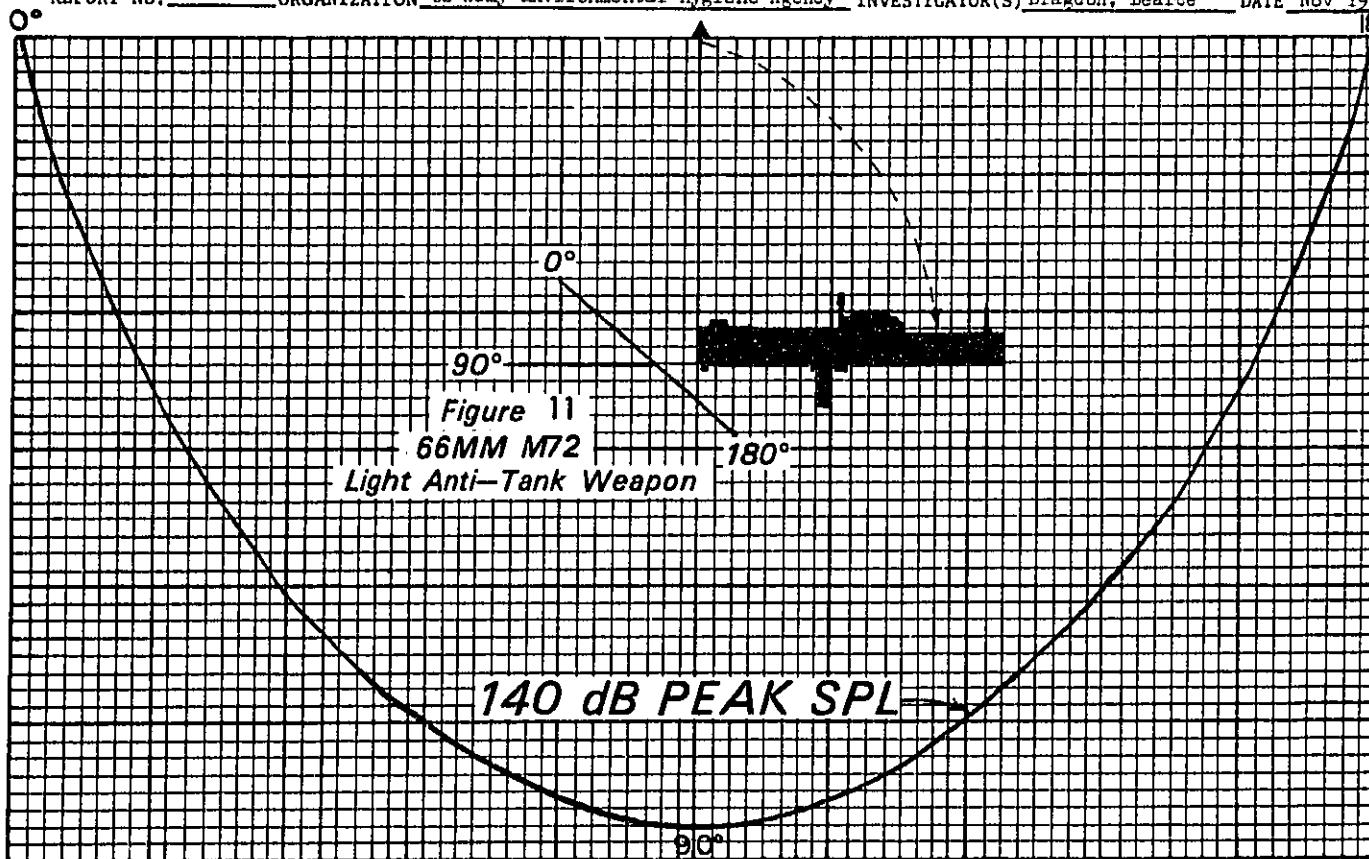

SCALE 1" = _____

USAEHA Form NP-2-2, 3 Feb 70



Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources


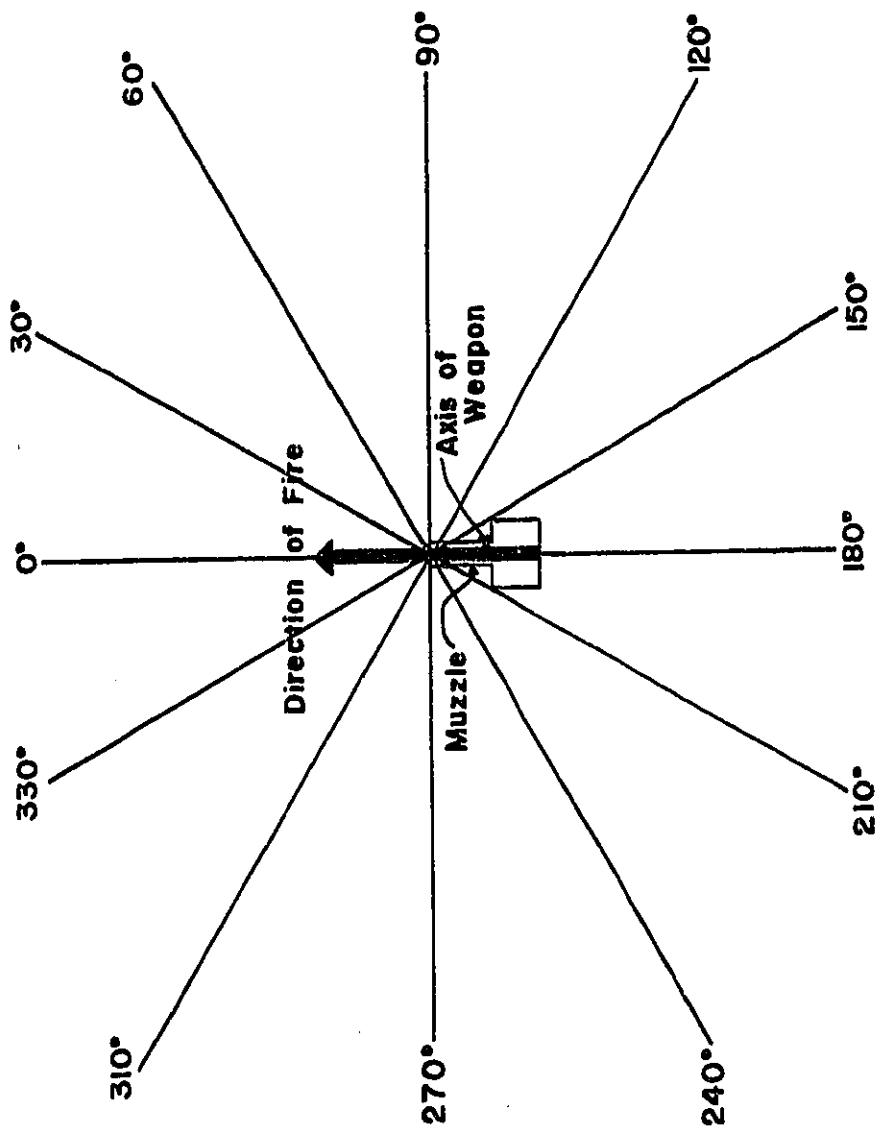


FIGURE 12 TEST SITE PLAN


NOISE REPOSITORY CONTOUR SHEET

MATERIAL CATEGORY Weapon Crew Served 120 mm Gun, Tank Mounted FSN _____
 MFG MODEL Bio-Acoustics REPORT TITLE Special Study, Weapons Contour
 SERIAL NO. 7-9 ADD 71 INVESTIGATOR(S) Braslon, Frear,
 ORGANIZATION US Army Environmental Hygiene Agency DATE 7-9 ADD 71
 REPORT NO. Sowinski, Ferrar

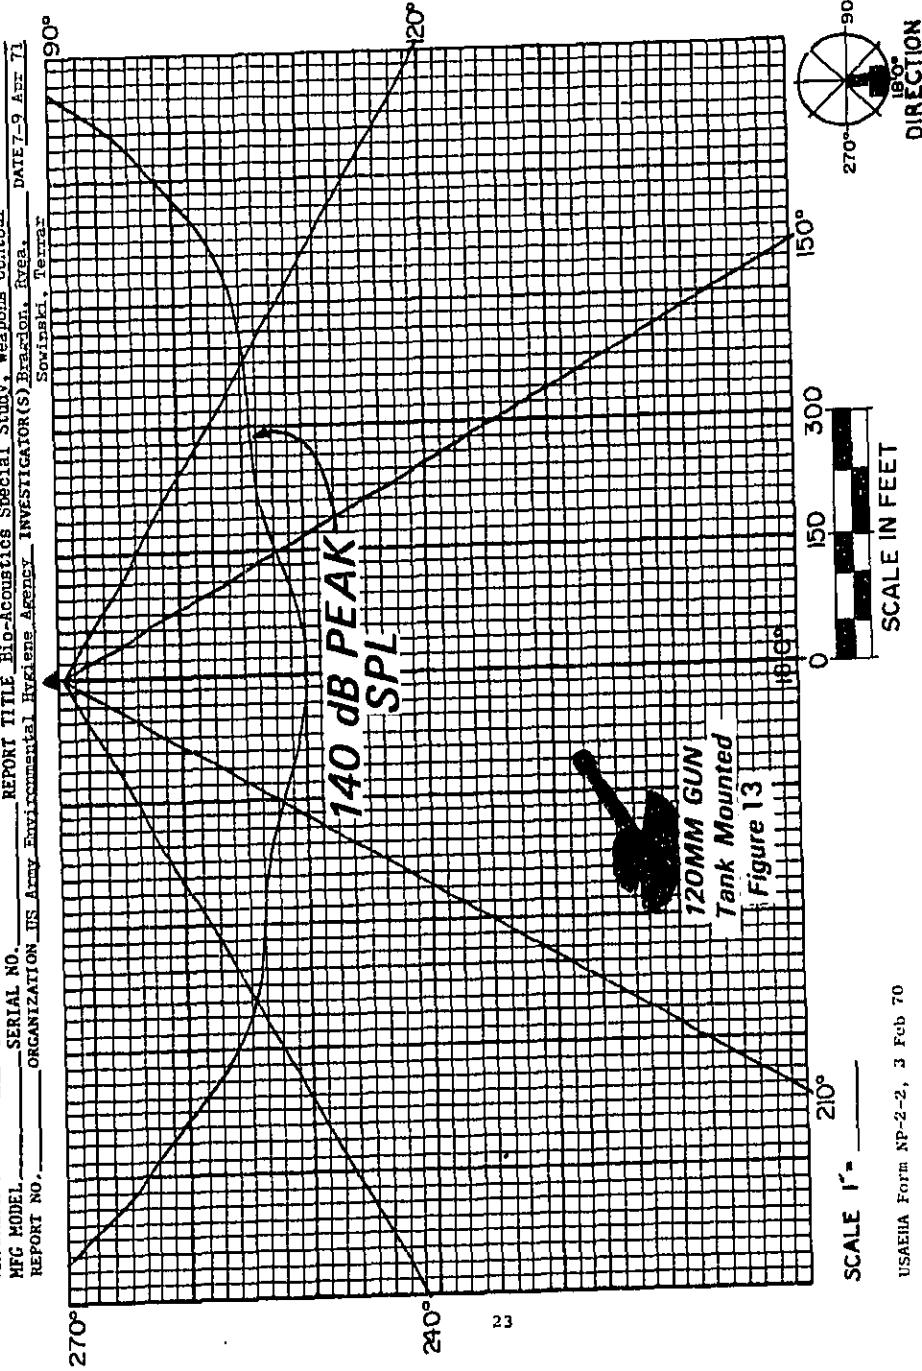


NOISE REPOSITORY CONTOUR SHEET

MATERIEL CATEGORY Weapon: Crew Served
 MFG MODEL 152 MM Gun, Pedestal Mounted
 SERIAL NO.
 REPORT NO.
 ORGANIZATION US Army Environmental Hygiene Agency INVESTIGATOR(S) Bragdon, Byra,
Sovinski, Ferrar DATE 3 June 71

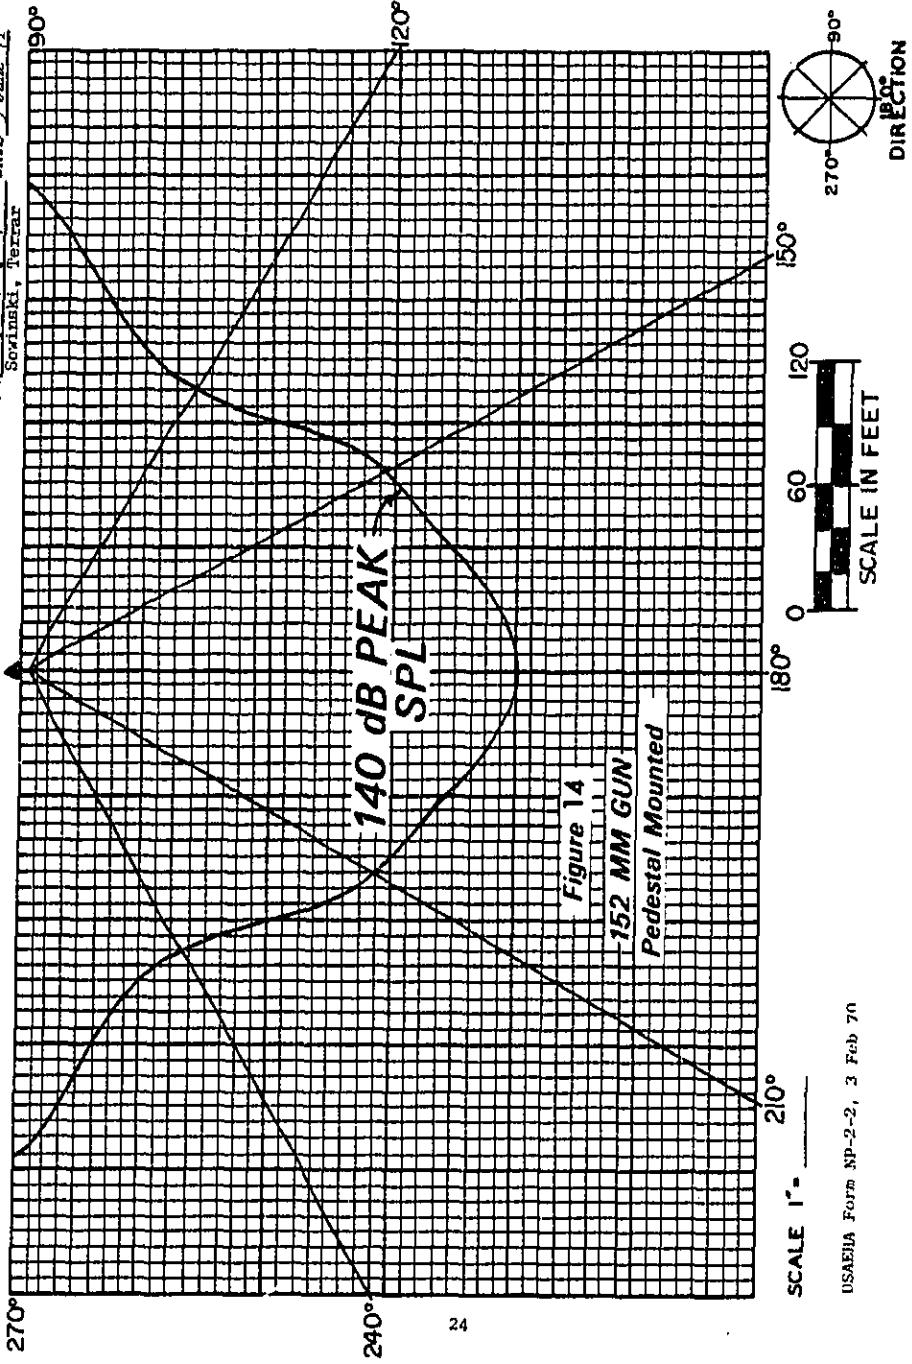


NOISE REPOSITORY CONTOUR SHEET

MATERIEL CATEGORY: Weapon: Crew Served Nomenclature: 105 mm Howitzer, Light, Towed, Milli, FSN
 MFG MODEL: SP REPORT TITLE: Bio-Acoustics Sp Study, Weapons Contour
 SERIAL NO.: 30 ORGANIZATION: US Army Environmental Hygiene Agency, INVESTIGATOR(S): Bragdon, Ryes.
 REPORT NO.: 330 DATE: 9 June 71

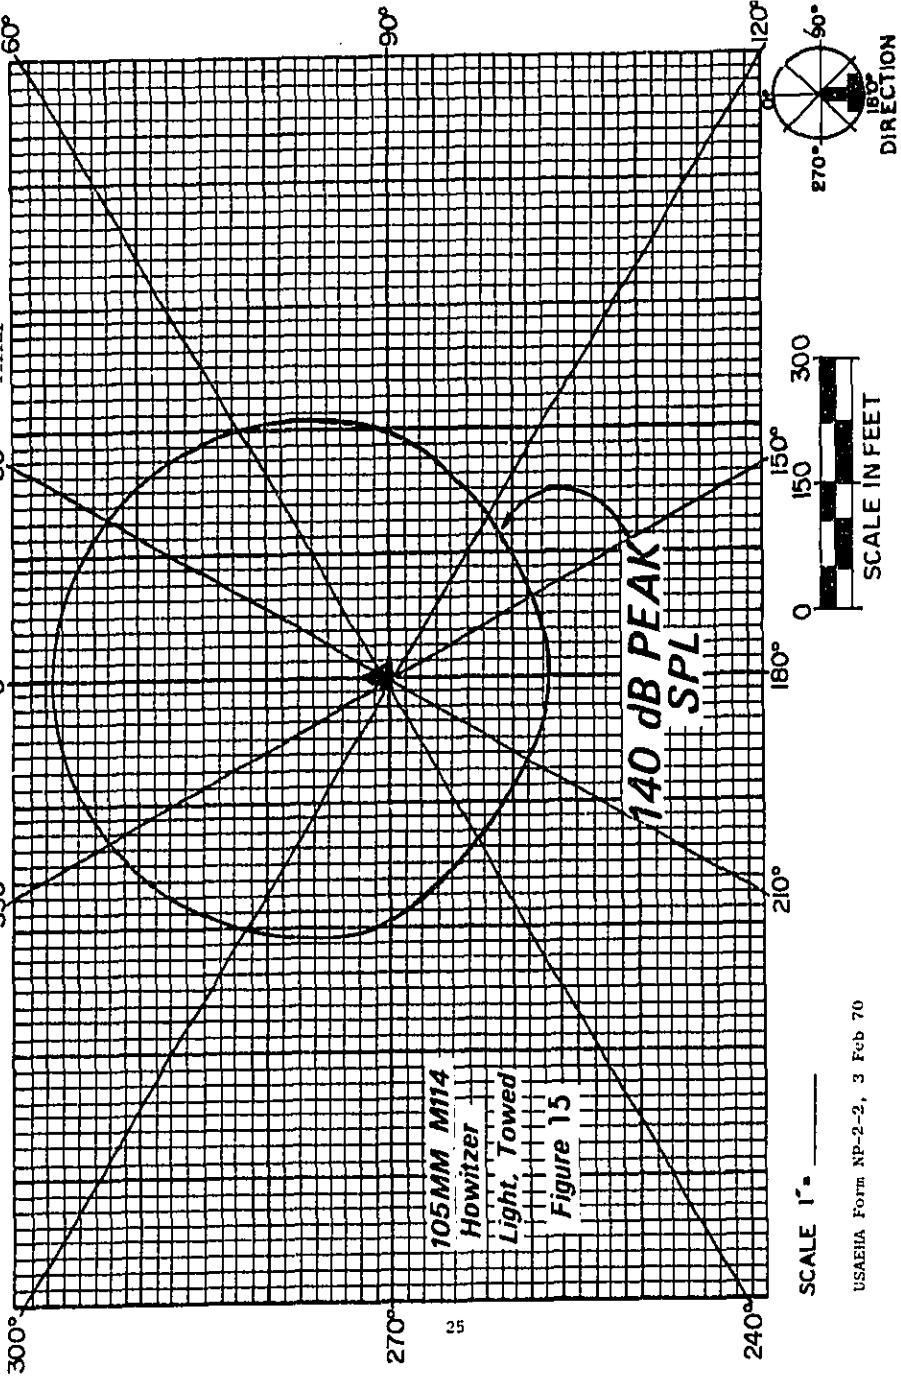


NOISE REPOSITORY CONTOUR SHEET

MATERIEL CATEGORY Weapon, CREW SERVED _____
 MFG MODEL 155 mm, REPORT TITLE Self-Propelled Howitzer, M109 PSN
 SERIAL NO. , ORGANIZATION US Army Environmental Research Agency, INVESTIGATOR(S) Braeden, Ryers, DATE 10 June 71
 REPORT NO. Terrar

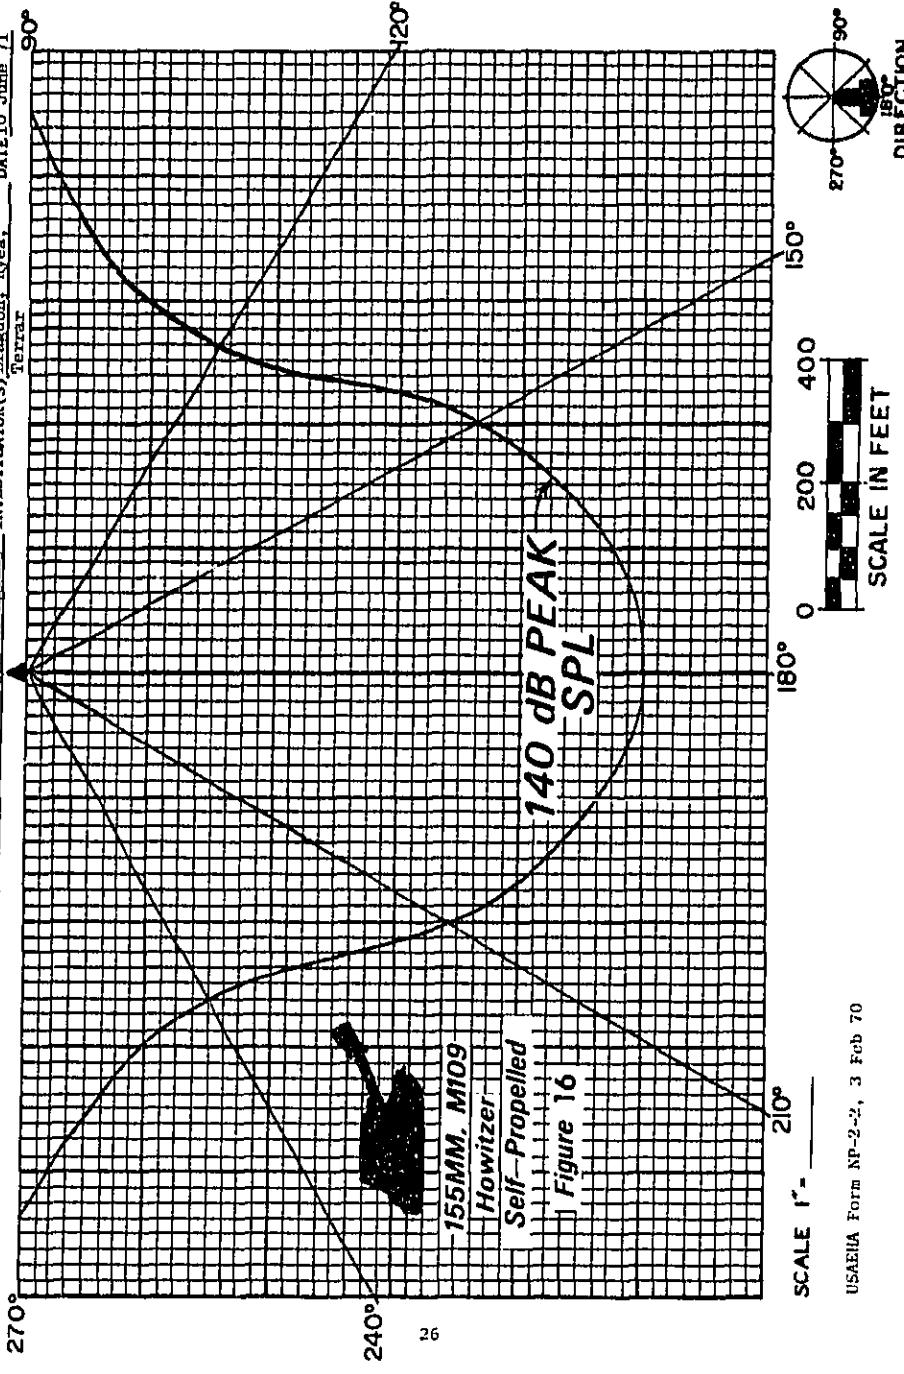


NOISE REPOSITORY CONTOUR SHEET

MATERIEL CATEGORY Weapons Crew Served 155 mm Howitzer, Medium, Towed, M114A1
 NFC MODEL 155 mm Howitzer REPORT TITLE Bio-Acoustics Sp Study, Weapons Contour
 SERIAL NO. 330 ORGANIZATION US Army Environmental Hygiene Agency INVESTIGATOR(S) Branson, Ryee DATE 10 June 71
 REPORT NO. TERMIN

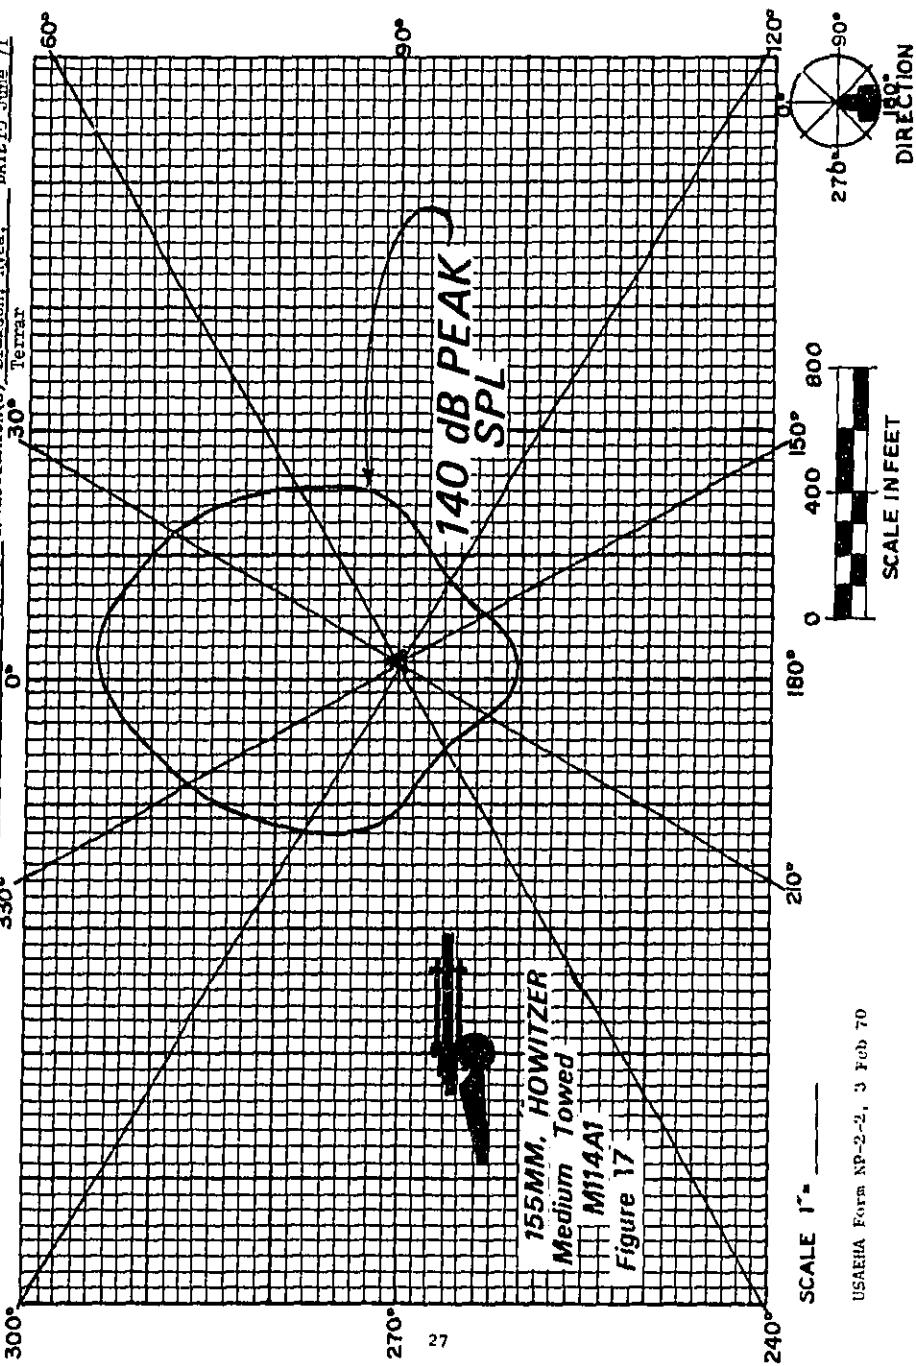

NOISE REPOSITORY CONTOUR SHEET

Technical Guide (Mod)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

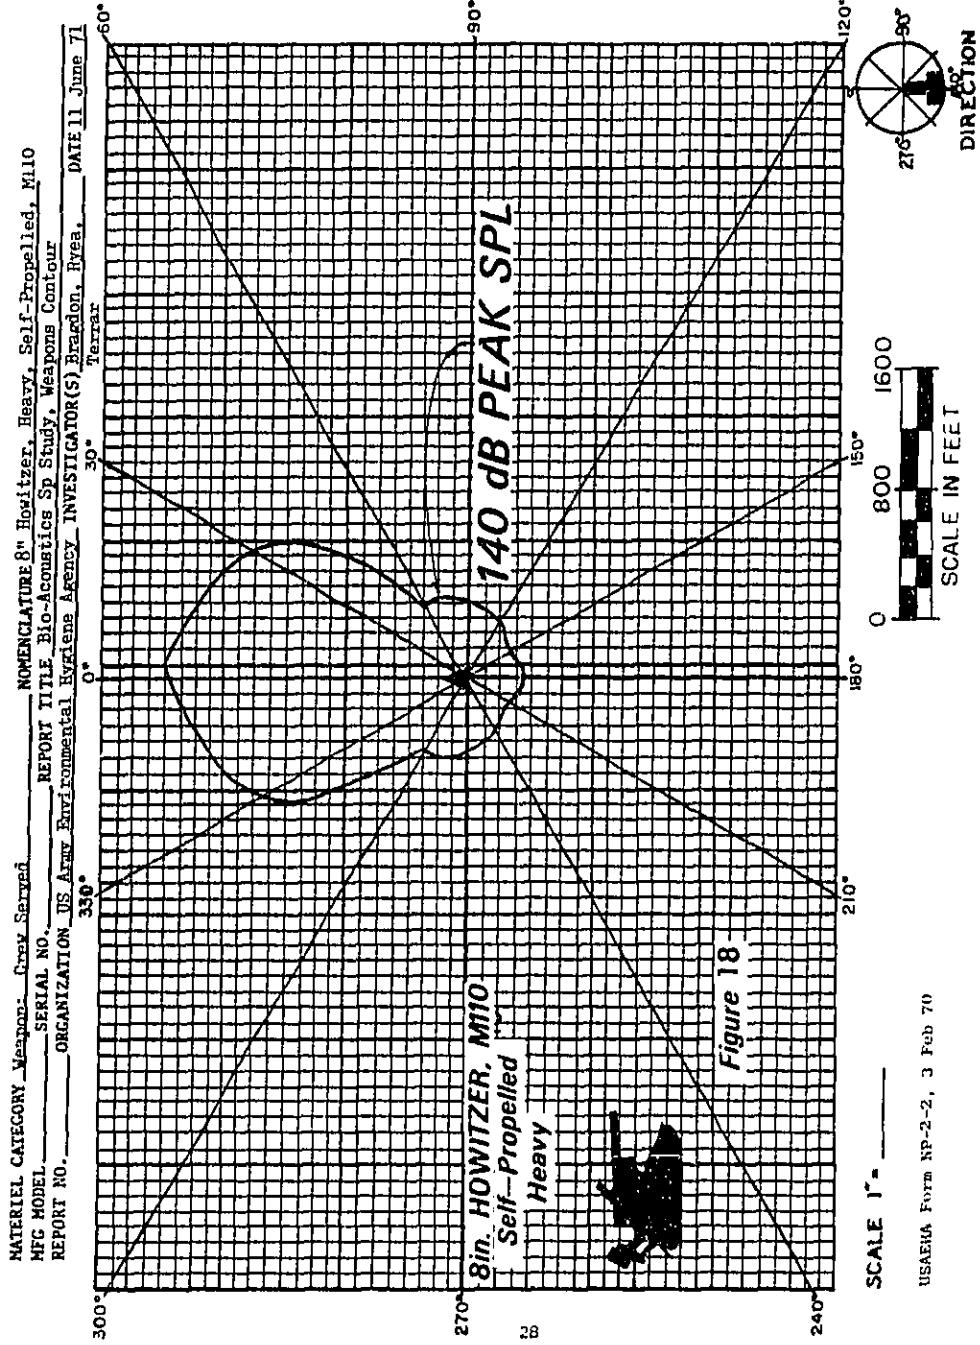

NOISE REPOSITORY CONTOUR SHEET

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

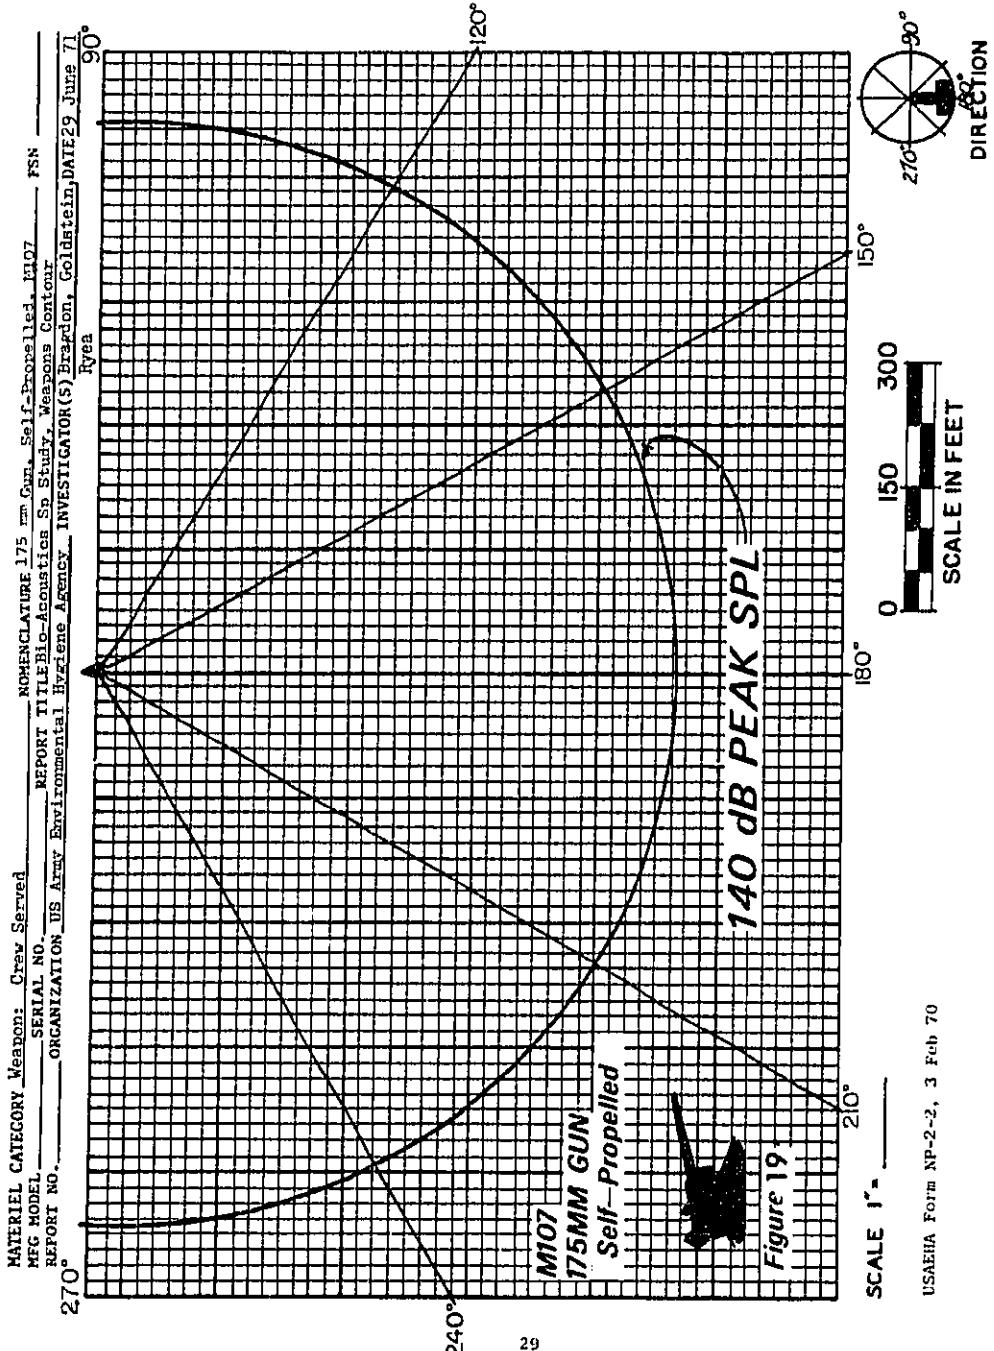


Figure 19+

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

III. SOUND LEVEL DATA

A. Aircraft: Fixed Wing	Sound Level dB(A)*
1. C-5A (USAF) - (Between Pilot & Co-Pilot)	77
2. C-141A	91†
3. F-4E	107†
4. O-1E Bird Dog	108
5. OV-10A Bronco	101†
6. P-3A Navy (Co-Pilot)	90†
7. P-3A New Model 3 Navy (Co-Pilot)	90†
8. S2E	116†
9. T-41A Mescalero (Between Pilot & Co-Pilot)	96†
10. T-41C Mescalero (Between Pilot & Co-Pilot)	101
11. U-1A Otter (Co-Pilot)	110†
12. U-6A Beaver	104
13. U-8D Seminole (Between Pilot & Co-Pilot)	110†
14. U-8F Seminole (Between Pilot & Co-Pilot)	106†
15. U-9B Aero Commander (Between Pilot & Co-Pilot)	103†
16. U-21A Ute	98

*At pilot's position unless otherwise stated.

†Calculated from octave band data.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

B. <u>Aircraft: Rotary Wing.</u>	<u>Sound Level dB(A)*</u>
1. CH-21C Shawnee (Between Pilot & Co-Pilot)	106†
2. CH-34C Choctaw (Between Pilot & Co-Pilot)	103†
3. CH-37B Mojave (Between Pilot & Co-Pilot)	115†
4. CH-47B Chinook (Between Pilot & Co-Pilot)	105†
5. CH-47C Chinook	110
6. HT-1A Tethered Helicopter Trainer	106
7. OH-6A Cayuse	94
8. OH-13 Sioux (Between Pilot & Co-Pilot)	105†
9. OH-23 Raven	102†
10. OH-23D Raven	107†
11. TH-55 Helicopter	93†
12. UH-1 Iroquois	98-110†
13. UH-1A Iroquois (Co-Pilot)	94†
14. UH-19D Chickasaw (Between Pilot & Co-Pilot)	86
C. <u>Aircraft: Short Takeoff/Landing.</u>	
OV-10A Mohawk (Between Pilot & Co-Pilot)	92†

*At pilot's position unless otherwise stated.

†Calculated from octave band data.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

<u>D. Data Processings</u>	<u>Sound Level dB(A)*</u>
1. Card Processor, Univac 1004	92
2. Card Processor, Univac 1005	93
3. Card Reader, GE	92
4. Card Sorter	82
5. Disk Drive	76
6. Dura Machine, 1041	80
7. Keypunch	78
8. Keypunch, IBM 26	86
9. Printer 1401	78
10. Printer 1403	80
11. Printer 1404	80
12. Printer, GE	93
13. Verifier	75
14. Verifier, IBM 56	85

*At operator's position unless otherwise stated.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

E. <u>Machinery Fabrication: Metalworking</u>	<u>Sound Level dB(A)*</u>
1. Acetylene Welding Unit, Dockson Corp. #5	92
2. Blast Cleaning Unit, Pangborn Corporation	102
3. Grinder, Aro Equipment Co. 7583C	98
4. Grinder, Aro Equipment Co. 7980	101
5. Grinder, Aro Flathead 8300P8-4	95
6. Grinder, Black & Decker	92
7. Grinder, Black & Decker, Type A	102
8. Grinder, Dayton Power 17853	95
9. Grinder, Hisey Wolf 27D	96
10. Grinder, Van Normachine Co. 444	93
11. Input Gun, Remington	104
12. Liquid Honing Machine, Vapor Blast B-20	96
13. Lock Hammer, Milwaukee Elect. Tool Corp. 4500	110
14. Metal Cutter, Tensikut 10-10, Siebury Ind.	101
15. Metal Flame Spray, METCO 4BWH	120
16. Metalizing Unit, METCO Type C	115
17. Metalizing Unit, METCO Type K	115
18. Pipe Threader, Rigid 300	93
19. Rivet Gun, Cleco E3	110
20. Sander, Metal, Black & Decker	96
21. Welding Machine, Wilson BAZOO	99

*At operator's position unless otherwise stated.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

F. <u>Machinery Fabrication: Paper, Printing & Publishing Sound Level dB(A)*</u>	
1. Baumfolder, Bell & Howell, 17 1/2 x 22 1/2	85
2. Baumfolder, 333, 26 x 40	91
3. Binder, Martinez, EB	92
4. Collator, Didde-Glasser, Inc.	90
5. Collator, Harris Intertype Corp. 232	82†
6. Cutler Copyfloc Printer	86
7. Disintegrator, Paper, J. B. Sedbury, Size 10BC	100
8. Folding Machine, Dexter, 5R23	93
9. Folding Machine, Fold-O-Matic	88†
10. Offset Press, ATF Chief 22	86
11. Offset Press, Duplicator MGD 22	86
12. Offset Press, Fairchild Davidson 500	92†
13. Offset Press, Harris, LTN 23-36	84
14. Offset Press, Multilith 1250	86
15. Offset Press, Multilith 1275	85
16. Offset Press, Multilith 2024	85
17. Offset Press, Multilith 2550	87
18. Offset Press, Multilith 2650	86
19. Paper Shredder, Model 22	96
20. Paper Shredder, S.E. Machinery Co. #3	110
21. Paper Shredder, S.E. Machinery Co. Model 1424	102

*At operator's position unless otherwise stated.

†Calculated from octave band data.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A) *</u>
22. Press, Printing	95†
23. Printer, High Speed, Honeywell	103
24. Pulverizer, Document	96
25. Pulverizer, Paper	101
26. Xerox, Copyflo Printer	77
G. <u>Machinery Fabrication: Stone, Clay, & Glass.</u>	
1. Chipping Hammer, Ingersoll-Rand, Size MC121	118
2. Crusher, Eagle, Diesel 5157B	95
3. Crusher, Eagle, Roll 5230B	105
4. Crusher, Pioneer Jaw, 54VDE	109
5. Crusher, Pioneer Secondary Roll, 154VDE	106
6. Crusher, Eagle Roll Mfg. Co. R-6501	105
7. Sandblasting Cabinet, Ruemelin Mfg. Co.	98
H. <u>Machinery Fabrication: Textile/Apparel.</u>	
1. Drying Tumbler, Dry Cleaning, Troy Minute Man FT11400	94
2. Laundry Machine, Troy 60" Olympic	88
3. Press, Pants, Colmac, Pant-O-Matic 500	90
4. Shoe Repair	89†
5. Stitcher, Shoe, Landis #12 Model K	96

*At operator's position unless otherwise stated.
†Calculated from octave band data.

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Level Data of Noise Sources

<u>I. Machinery Fabrication: Woodworking</u>	<u>Sound Level dB(A)*</u>
1. Bandsaw, Crob NS36	114
2. Bandsaw, Delta-Milwaukee 20	110
3. Bandsaw, Doall, Metal 26	96
4. Bandsaw, Doall, Metal 26	91
5. Bandsaw, Doall, ML 16 in	96
6. Bandsaw, Moak	100
7. Bandsaw, Tameirtz, Type G-1	94
8. Bandsaw, Zephyr 36	104
9. Chainsaw, Homelite Mfg. Co. W1255	115
10. Chainsaw, Homelite Super 77	125
11. Chainsaw, McCullerck MAG 10-10	108
12. Chainsaw, Whitehead Saw Co., Type II	118
13. Circular Saw, Davis & Wells, Tilting	99
14. Circular Saw, Delta Rockwell L-40-C	104
15. Circular Saw, Root Woodworking 43-20-J	102
16. Construction Saw, DeWalt Industrial 2185A	96
17. Cross-Cut Saw, Automatic 1-H	94
18. Cross-Cut Saw, DeWalt 3561-98	100
19. Cutoff Saw, DeWalt GE	107
20. Cutoff Saw, DeWalt GL	112
21. Cutoff Saw, Porter 43-20J	98

*At operator's position unless otherwise stated.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A)*</u>
22. Cutoff and Rip Combination Saw, DeWalt	112
23. Drill, 3/8-in Skil	103
24. Grinder, Tooline	92
25. Jointer, General Electric	100
26. Jointer, Oliver 166CD	87
27. Jointer, Porter 300c	102
28. Jointer, Powermatic 50	86
29. Jointer, Oliver 12-80	102
30. Mitre Saw, Rockwell Electric 34-C10	95
31. Nailer, Duo-fast CN-137	104
32. Panel Saw, Black & Decker T483-12	114
33. Planer, Buss Machine Works	104
34. Planer, Craftsman 112	98
35. Planer, Greenell 110	102
36. Planer, Newman 600	105
37. Planer, Newman Surface	108
38. Planer, Oliver 361	90
39. Planer, Powermatic	103
40. Planer, Powermatic 100	100
41. Planer, Powermatic 224	99
42. Planer, Rockwell Motor	100
43. Planer, Woodworkers	112

*At operator's position unless otherwise stated.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A)*</u>
44. Planer, Yates J18	104
45. Power Saw, Delta	94
46. Power Saw, Delta Unisaw CM505	94
47. Power Saw, Newman-Surfacer	100
48. Radial Saw, 450	106
49. Radial Saw, Delta Rockwell	96
50. Radial Saw, DeWalt	108
51. Radial Saw, DeWalt CA509	102
52. Radial Saw, DeWalt C-E-57	104
53. Rip Saw, Atlas 3090	97
54. Rip Saw, Delta Rockwell	100
55. Rip Saw, G.B. Diekl	96
56. Rip Saw, G.B. Diekl 750	99
57. Rip Saw, GM Diehr 750	92
58. Rip Saw, Wabach Industrial 750	97
59. Rip Saw, Yates American B.	102
60. Router, Black & Decker	118
61. Router, Rockwell 150B	100
62. Saber Saw, Milwaukee	93
63. Sander, Black & Decker	92
64. Sander, Reliance, Type GS	90

*At operator's position unless otherwise stated.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A)*</u>
65. Shaper, Delta Rockwell	94
66. Shaper, Master, Type PA	104
67. Surfacer, Newman	100
68. Swing Saw, Oliver 136	90
69. Table Saw, Atlas 3160	89
70. Table Saw; Beach	108
71. Table Saw; Delta 100	90
72. Table Saw, Northfield	105
73. Table Saw, Oliver 290	104
74. Table Saw, Tannevitz, Type J	107
75. Table Top Saw, Northfield Arrow	105
 <u>J. Machinery Fabrication: Pneumatic.</u>	
1. Bander, Air, Gerrad & Co. 689	99
2. Chisel, Air, Chicago Mfg. Co. 1104	125
3. Drifter, Pneumatic, Ingersoll-Rand, CM150AD475A	116
4. Drill, Air, Aro 7512D	92
5. Drill, Rock, G900	118
6. Hammer, Pneumatic	97†
7. Hammer, Skil 1160-T1	132
8. Motor, Air DOTCO 10-252A	94

*At operator's position unless otherwise stated.

†Calculated from octave band data.

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level</u> <u>dB(A)* Peak</u>
9. Nailer, Bostich N2	142
10. Nailer, FAS	141
11. Rivet Gun, B.F. Goodrich	101*
12. Riveter, Chicago, Aero #2	92*
13. Sander, Disk, National-Detroit Dual Action	100
14. Stapler, Senco Mill	94*
15. Stapling Gun, Bostich II	105*
16. Stapling Gun, Bostich III	104*
17. Wrench, Air Speed, Cleco WP600	107
18. Wrench, Sioux Corp. 316	95
 K. <u>Machinery Fabrication: General.</u>	
1. Chamber, Environmental Test, Thermatron Corp., Model F-62-CHU-25-25	92
2. Conveyor, Link Belt Co.	104
3. Disintegrator, Hines 1425	92
4. Elevator, Aggregate, Barber-Green 882-241	105
5. Extractor, Money, American Laundry Machine Company	104
6. Footworking Machine, 43-20J	100
7. Hose, Airline, DeVilbiss, DGB	100
8. Nibbler, Modern Mfg. Co.	97

*At operator's position unless otherwise stated.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A)*</u>
9. Pumps, Water, Fairbanks-Morse Type H	98
10. Spectrometer, Metal, SpecPower, National Spec. Laboratory	92
11. Streak, Camera, Beckman & Whitey, Model 70	98
12. Surgical Equipment Cleaner, 1224LR	94
13. Tanks, Impregnating, 1-36-54J	120
L. <u>Vehicles: Noncombat.</u>	
1. Case 310 (Noise Abatement)†	97
2. Caterpillar, 824 (Noise Abatement)†	109 91
3. Caterpillar, 922 (Noise Abatement)	85
4. Caterpillar, 922B (Noise Abatement)†	95 89
5. Caterpillar, 933 (Noise Abatement)†	89
6. Caterpillar, 950 (Noise Abatement)†	87
7. Caterpillar, 955H (Noise Abatement)†	93
8. Caterpillar, 966B	96
9. Caterpillar, 977H (Noise Abatement)†	101 86
10. Caterpillar 988	96

*At operator's position unless otherwise stated.

†Not specified in report.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A)*</u>
11. Caterpillar, D4 (Noise Abatement)†	92
12. Caterpillar, D7 (Noise Abatement)†	100 90
13. Caterpillar, D8	103
14. Caterpillar, D9	89
15. Caterpillar, Land Clearing Kit, 97F	104
16. Crane, Bucyrus Erie, 22BM	99
17. Crane, Bucyrus Erie, Crawler Shovel	101
18. Crane, Drag Line, LS-68	101
19. Crane, Hanson, H446A, 5 ton	91
20. Crane, Koehring Company, 3/4 yard	103
21. Crane, Pauling & Harnische	102
22. Crane, Rough Terrain, 20 ton	101
23. Crane, Rough Terrain, American Hoist and Derrick Company	104
24. Crane, 220 HP Diesel Engine, 100 ton	95
25. Ditcher, Parsons 624VL	104
26. Ditcher, Pow-R, Vermeer Co.	99
27. Drill, Rock, Gardiner Denver	112
28. Drill, Rock, Ingersoll-Rand	116

*At operator's position unless otherwise stated.

†Not specified in report.

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A)*</u>
29. Euchal, 72-21 (Noise Abatement)†	96
30. Euchal, 82-30 (Noise Abatement)†	89
31. Euchal C-6 (Noise Abatement)†	102 92
32. Euchal R35 (Noise Abatement)†	89
33. Euchal TS-24 (Noise Abatement)†	101 91
34. Evinrude Skeeter, Snowmobile	87
35. Fork Lift, 6K, AC, WH	95
36. Fork Lift, 10K	100
37. Fork Lift, Athey, 6K, RT, DES	97
38. Fork Lift, Baker, 6K, WH	95
39. Grade-All, GS00 (Noise Abatement)†	86
40. Grade-All, Warner & Swasey G600	96
41. Grader, Caterpillar 12	108
42. Grader, Caterpillar 120	99
43. Grader, Galion Co., three cylinder	98
44. Grader, WABCO 330	106
45. Grove 35 (Noise Abatement)†	92 88
46. Grove RT48 (Noise Abatement)†	90

*At operator's position unless otherwise stated.

†Not specified in report.

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A)*</u>
47. Hough, H70	93
48. Hough, H100	98
49. Hough, H120	100
50. Hough, H400 (Noise Abatement)†	95 84
51. Hough, HA (Noise Abatement)†	91
52. Hough, Hog (Noise Abatement)†	98 91
53. Hough, HM	91
54. Hough, TD 300 SL (Noise Abatement)†	100 98
55. International, INT TD 30	103
56. International TD-9 (Noise Abatement)†	95
57. International Travelall D-1000	71
58. Kaiser Jeep Wagoner	78
59. Kenworth, W923	93
60. Liquid Distributor, Universal	91
61. Loader, AC, 645M	98
62. Loader, Euclid, 128 HP	100
63. Loader, Hough, H90 CM	104
64. Loader, Lance Transport	81‡
65. Lorain ML-250 (Noise Abatement)†	98 86

*At operator's position unless otherwise stated.

†Not specified in report.

‡Calculated from octave band data.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A) *</u>
66. Lull 7CL-31	92
67. Mack F685ST	91
68. Moto-Ski, 399, Snowmobile	92
69. Moto-Ski, 500, Snowmobile	87
70. Moto-Ski, Zephyr, Snowmobile	87
71. Oliver 46-3 (Noise Abatement)†	91
72. Oliver OC4 (Noise Abatement)†	92
73. Pettibone, 15 (Noise Abatement)	104 94
74. Polaris Mustang, Snowmobile	84
75. Polaris TX, Snowmobile	91
76. Raider 400, Snowmobile	77
77. Recovery Vehicle, A-Wing M88	94
78. Roller, Roll-O-Packer	111
79. Ski-Doo 300, Snowmobile	90
80. Ski-Doo Alpine 399 ER, Snowmobile	80
81. Ski-Doo Elan, Snowmobile	80
82. Ski-Doo Nordic 375, Snowmobile	86
83. Ski-Doo Olympique, Snowmobile	90
84. Ski-Doo TNT, Snowmobile	92
85. Ski-Whiz, Snowmobile	86

*At operator's position unless otherwise stated.
†Not specified in report.

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Level Data of Noise Sources

	<u>Sound Level dB(A)*</u>
86. Sno-Jet, Snowmobile	99
87. Sweeper, Elgin Sweeper Company 475	97
88. Sweeper, Street, Wayne Mfg. Co. 973	88
89. Tractor, Caterpillar D5A	101†
90. Tractor, Caterpillar D7E	106
91. Tractor, Caterpillar 830MB	102
92. Tractor, Diesel 290M	81‡
93. Tractor, Ford, Selecto-Speed 881	96
94. Tractor, International Harvester, I2504	87
95. Tractor, International Harvester, I2656	90
96. Tractor, International Harvester, Diesel TD-15	95
97. Train, Diesel Electric, 120 Ton, B-2074	78
98. Truck, Cargo M656	102
99. Truck, Euchal (Noise Abatement)‡	101 85
100. Truck, Ford F-500	84
101. Truck, Fork Lift, Anthony Company	102
102. Truck, International F2000 DYT	95
103. Truck, Kenworth, W923	92
104. Truck, Mack F-785T	91
105. XM759	108

*At operator's position unless otherwise stated.

†Not specified in report.

‡Calculated from octave band data.

Technical Guide (Med)
Noise Hazard Evaluation - Sound Level Data of Noise Sources

Sound Level dB(A)*

M. Vehicles: Combat.

1. Car, Armored, Light, XM706 Commando 4X4, Cruising Speed 35 MPH	103
2. Carrier, Armored Personnel, M113A1, FMC Corporation, Troop Compartment during operation - 30 MPH	117
3. M48 Tank Engine (maintenance area)	93
4. M106A1, Carrier, Mortar - 30 MPH	116
5. M110 Chassis for self-propelled gun motor carriage, Idle speed - 1500 RPM	103
6. M113, Carrier, Full-tracked - 30 MPH	119
7. M114A1, Carrier, Retrofitted, Command and Reconnaissance	109
8. M548, Carrier, Cargo, Full-tracked - 35 MPH	114
9. Tank Engine, AVS1 895 Operating at Idle Speed	96
10. Tank, Sheridan, M551 Diesel, Idle Speed during General Maintenance	106
11. XM577, Carrier, Command Post - 30 MPH	120
12. XM727, Carrier, Missile - 2500 RPM	104
13. XM765, Combat Vehicle, Mechanized Infantry - 30 MPH	110

*At operator's position unless otherwise stated.

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Level Data of Noise Sources

	Sound Level <u>dB(A)*</u>	<u>peak</u>
N. Vehicles: General.		
1. Engine, 113-A1, 6V-53	96	
2. Engine, AV 51 895	96	
3. Engine, Continental Corp. M60	104	
4. Engine, Diesel, Caterpillar D-346	101	
5. Engine, Diesel, Detroit 6V53	111	
6. Engine, Diesel, Detroit AV71T	118	
7. Engine, Diesel, Eagle Crusher 5157B	95	
8. Engine, Diesel, Eagle Roll Crusher 5230B	105	
9. Engine, Diesel, General Motors V16	98	
10. Engine, M48-A2	100	
11. Pump, Fuel Injector, Tester, Bosch Pump	107	
12. Whistle, Locomotive, GE 39360	119	
O. Weapons: Artillery.		
1. Cannon, 20 mm Vulcan XM163	163	
2. Howitzer, 105 mm (gunner position)	189	
3. Gun, 175 mm (commander position)	166	
4. Gun, Air Defense, Artillery, 20 mm (gunner position)	150	
5. Gun, Command Track, 20 mm, M-114	150	

*At operator's position unless otherwise stated.

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Level Data of Noise Sources

	Sound Level dB(A)*	Peak
6. Gun, Tank, 105 mm (measured 13 ft away)	179	
7. Gun, Tank, 152 mm, XM625 (left gunner outside position)	189	
8. Gun, Tank, 152 mm, XM657E1 (assistant driver's position)	191	
9. Gun, Tank, M48A2, 90 mm (measured 12 ft away)	187	
10. Gun, Tank, M48A3, 90 mm	181	
11. Gun, M68, Tank-mounted, 105 mm (measured 13 ft away)	179	
12. Howitzer, 155mm Medium, M1A2E3	185	
13. Launcher, Grenade, 40 mm, XM182	166	
P. Weapons: Individual Small Arms.		
1. Grenade, Hand, M-26 (25 ft away)	171	
2. Grenade, Hand, M-116A1 (75 ft away)	142	
3. Infantry Assault Weapon, Light, LAW M-72, M72A1	180	
4. Launcher, M20-A, 35" Rocket	171	
5. Rifle, M14, 7.62 mm, Automatic	159	
6. Rifle, M16, 5.56 mm, Automatic	156	
Q. Weapons: Crew Served Small Arms.		
1. Gun, Vulcan, 20 mm, M61A1	153	
2. Gun, Vulcan, 20 mm, XM197	159	
3. Machine Gun, 50 caliber	160	

*At operator's position unless otherwise stated.

Technical Guide (Med)
 Noise Hazard Evaluation - Sound Level Data of Noise Sources

	Sound Level dB(A)*	Peak
4. Machine Gun, M60, 7.62 mm	155	
5. Minigun, 7.62 mm	146	
6. Minigun, 20 mm	155	
7. Mortar, 81 mm	161	
8. Rifle, Recoilless, M18, 57 mm	174	
9. Rifle, Recoilless, M40A1, 106 mm	188	
10. Rifle, Recoilless, M67, 90 mm	181	
11. Submachine Gun, XM177E2, 5.56 mm	160	
R. Weapons: Armament Subsystems.		
1. 7.62 mm, M73E1, Machine Gun	145	
2. Gun, 20 mm, M139 mounted on M113 Carrier, Personnel, Full Tracked, Armored	147	
3. 20 mm, M139 Weapon installed on XM808 Twister Vehicle	152	
4. Claymore Mine on M113 Personnel Carrier	146	
5. Two Machine Guns, 7.62 mm, M73, mounted on Cupola XM33 SM734 Full Tracked, Armored Personnel Carrier	142	
6. XM-8, 40 mm Grenade Launcher, mounted on OH-6, Cayuse	163	
7. XM-27, 762mm Machine gun, mounted on OH-6A Cayuse	154	
8. XM-30, 30 mm Automatic gun, mounted on UH-1C, Iroquois	157	

*At operator's position unless otherwise stated.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

	Sound Level
	<u>dB(A)*</u>
	<u>Peak</u>
9. XM-41, 7.62 mm Machine gun, mounted on CH-47A, Chinook	148
10. XM-59, 50 Caliber Machine gun mounted on UH-1, Iroquois	169
11. XM-129, Grenade Launcher, mounted on AH-1G, Huey Cobrat	162
12. XM-134, Machine gun, mounted on AH-1G, Huey Cobra	132
S. Weapons: <u>Missile Systems.</u>	
1. Atlas	128
2. Bomarc	112
3. Chaparral	146
4. Dragon	184
5. Jupiter	118
6. Matador	110
7. Pershing	112
8. Thor	115
9. Titan	128
10. T.O.W.	170
11. Vanguard	116

*At operator's position unless otherwise stated.
†External Measurement.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

IV. HEARING PROTECTIVE DEVICES.

A. Three types of hearing protective devices are presently in the Army's inventory: the insert type (preformed and formable earplugs); the circumaural type, or ear muff; and the helmet, which incorporates communication components with a protective shell. Ordinarily, if an electronic communication system is not involved, earplugs and ear muffs are used, either alone or in combination. Only the earplugs listed in paragraph IV.B. have been approved by The Surgeon General of the Army. They have been tested for attenuation characteristics, durability, and freedom from possible toxic effects. In addition, only approved helmets and ear muffs that have been tested in accordance with military standards and specifications are authorized for use.

B. Helmets and ear muffs (aural protector, sound) are listed by National Stock Number in Supply Bulletin 700-20, Army Adopted and Other Items of Material for Authorization, 1 September 1973, page 2-14. Similar information for earplugs is contained in Federal Supply Catalog C-6515-IL. All of the hearing protective devices listed in these two documents [except the obsolete combat vehicle crewman's helmet (T56-6)], when properly used, provide attenuation equal to state-of-the-art capabilities. Selection, therefore, is based upon uniform, equipment, and situations requiring helmet-type headgear or radio-wire communication systems. Single flange earplugs, however, are suitable for use with helmets (such as the T56-6) and communication headsets if sufficient volume is available in the communication system. The combat vehicle crewman's helmet (T56-6) is being replaced by a new tanker's helmet, Model DH-132 that will provide adequate attenuation. Earplugs need not be used in combination with ear muffs unless the exposure exceeds 115 dB(A) steady-state noise. Preformed earplugs must be fitted individually to each ear by medical personnel to obtain adequate noise attenuation and maximum comfort. Suggested initial procurement percentages for the V-51R earplugs are as follows: extra-small, 5 percent; small, 15 percent; medium, 30 percent; large, 30 percent; and extra-large, 15 percent. Approximately 5 percent of the ear canals will be too large for the extra-large single flange plug. In these cases, the large triple flange plug should be tried. Failing this, arrangements should be made at an ear, nose, and throat clinic to obtain a custom molded device. Initial procurement of the triple flange variety should be 5 percent small, 75 percent regular, and 20 percent large. The triple flange earplugs are recommended when fittings are to be done in a limited period of time, such as at reception centers, for less time is required to fit the triple flange plug. Since ear canals vary widely in sizes and shape, it is necessary to have all sizes of both types of plugs (the single and triple flange) available for fitting and issue.

C. Damage to hearing is frequently incurred on the firing range where individuals are exposed to high noise levels and fail to utilize the hearing protectors which have been provided. Protection of permanent party personnel

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

is particularly important since they are subjected to long periods of daily exposure. The requirement for special headgear, e.g., helmets and helmet liners, precludes the use of standard circumaural protectors (ear muffs). Type II ear muffs designed with a suspension that can be worn over the head, behind the head, or under the chin can be used by permanent party personnel wearing drill instructor hats.

D. In view of the above information, it is recommended that earplugs be used by trainees, and ear muffs be used by permanent party personnel during weapons firing in a training situation. Each installation should determine the most feasible protective device for use by visitors.

V. SOUND MEASUREMENTS.

A. References. These data represent the best available information derived from various sources including surveys conducted by this Agency, and evaluation data provided by the following agencies:

1. USA Aeromedical Research Laboratory, Ft Rucker, Alabama.
2. Human Engineering Laboratories, Aberdeen Proving Ground, Maryland.
3. Ballistic Research Laboratories, Aberdeen Proving Ground, Maryland.
4. USA Medical Research Laboratory, Ft Knox, Kentucky.
5. USA Research and Development Laboratories, Ft Belvoir, Virginia.
6. Engineering and Environmental Test Section, Test & Evaluation Command, Aberdeen Proving Ground, Maryland.
7. USA Electronics Command, Ft Monmouth, New Jersey.
8. USAF, School of Aerospace Medicine, Brooks Air Force Base, Texas.

B. Measurements. All sound level data presented for impulse noise sources (i.e., weapons fire) are measured in decibels peak sound pressure level. The sound level data for steady-state noise sources are presented in decibels using the A-weighting network [dB(A)]. Unless otherwise specified, all sound level measurements were taken at the operator's position, with the materiel operating at its maximum sound output. In some instances, a maximum measured sound level is presented independent of the test conditions or site locations. The sound levels presented in this Guide are considered typical for each noise source.

Technical Guide (Med)

Noise Hazard Evaluation - Sound Level Data of Noise Sources

C. Weapon Characteristics. Information concerning the test data, locations, and ammunition of the artillery weapons is contained in the Appendix.

Technical Guide (Mod)
Sound Level Data of Noise Sources

APPENDIX

WEAPON CHARACTERISTICS

WEAPON	TEST DATE	LOCATION		AMMUNITION				
		Installation	Range	No. of Rounds	Type	Propellant Composition	Propellant Charge Designation No.	Propellant Charge
120 mm Gun, Tank Mounted	7-9 Apr 71	Camp Lejeune North Carolina	G-7	66	High Explosive (HE)	M58 M99	M45	I Charge (12.6 lbs charge weight) (22.3 lbs)
152 mm Gun, Pedestal Mounted, M81E1	3 Jun 71	Aberdeen Proving Ground, Maryland	H Field	32	do	M26E1	XMI90	I Charge (92.4 oz charge weight)
105 mm Howitzer, Light, Towed, M101A1	9 Jun 71	Fort Sill, Oklahoma	Firing Points 416 East 498 East	35	do	M1	M67	Zone 4 (16.3 oz charge weight)
155 mm Howitzer, Medium, Towed, M114A1	10 Jun 71	do	Firing Points 90 North 90 South	24	do	M1	M3	Zone 3 (49.4 oz charge weight) Zone 4 (63.7 oz charge weight)
8 Inch Howitzer, Heavy, Self- Propelled, M110	10 Jun 71	do	Firing Point 90 North	31	do	M1	M1	Zone 5 (209.1 oz charge weight)
155 mm Howitzer, Medium, Self- Propelled, M109	11 Jun 71	do	Firing Point 90 North	19	do	M1	M3	Zone 3 (49.4 oz charge weight) Zone 4 (63.7 oz charge weight)
175 mm Gun, Field Artillery, Self- propelled, M107	29 Jun 71	Aberdeen Proving Ground, Maryland	Position #3	28	do	M6	M86A2	Zone 3 (57.2 lbs charge weight)